
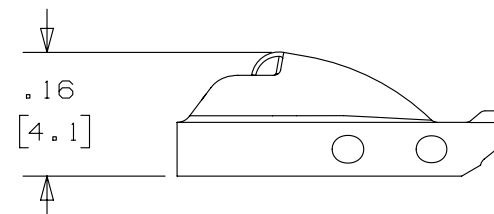



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT STAINLESS STEEL BANDING MBS-MR & MBS-TLR.
2. APPLICATION TOOL: GS4MT, PPTMT, ST2MT, ST3MT AND HTMT.
3. TOOL TENSION SETTING: 1 TO 4 (GS4MT & PPTMT TOOLS ONLY).
4. DIMENSIONS IN [] ARE MILLIMETERS.
5. MINIMUM LOOP TENSILE STRENGTH: 100 lbs. [445 N].
6. TOLERANCES: .XXX = $\pm .010$ [.254]
 .XX = $\pm .02$ [.508]
 .X = $\pm .03$ [.762]
 ANGLES = $\pm 2^\circ$

(A)



							TITLE						
							METAL LOCKING TIE HEAD STANDARD PART # MTHS-C						
							CUSTOMER DRAWING						
							ITEM REVISION NAME N41145BS/02				PANDUIT		
							DATASET FILE NAME N41145BS/02						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .1 [2.54] .XXX ± .005 [.127] .XX ± .01 [.25] ANGLES ± 5 ° THIRD ANGLE PROJECTION				MATERIAL: 304 STAINLESS STEEL		
02A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO. ORIG CAD FILE SPEC WAS S41145_01	SSECN01042					DRAWING NUMBER: N41145BS_DC		
01	10/03	BRH	DPN	JJB	Ⓐ ADDED ST3MT TO APPLICATION TOOL NOTE	11162							
00	8/03	JAMB	DPN	JJB	DRAWING RELEASED	10938							
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JAMB	DATE 8-13-03	CHK DPN	SCALE 4:1	SHT 1 OF 1	SIZE A	