




2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBH-MR & MBH-TLR.
2. APPLICATION TOOL: GS4MT, ST2MT, PPTMT, ST3MT^(A), OR HTMT.
3. TOOL TENSION SETTING: 4 TO 8 (GS4MT AND PPTMT ONLY)
4. DIMENSIONS IN [] ARE MILLIMETERS.
5. MINIMUM LOOP TENSILE STRENGTH: 250 LBS (1112 N)^(B)
6. TOLERANCES: .X = $\pm .030$ [$\pm .762$]
.XX = $\pm .020$ [$\pm .508$]
.XXX = $\pm .010$ [$\pm .254$]
ANGLES = $\pm 2^\circ$

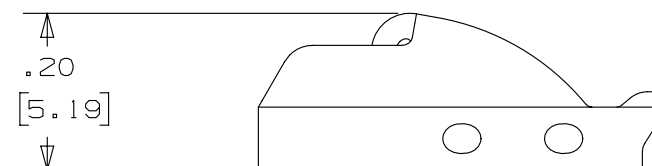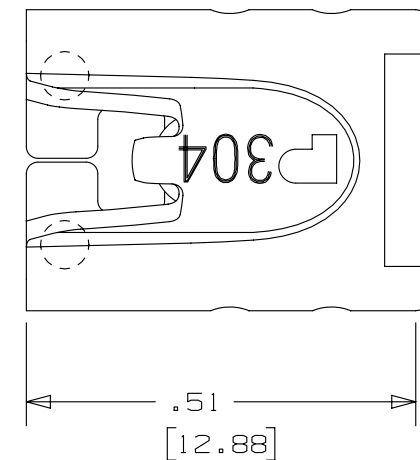

TITLE	
METAL TIE HEAD HEAVY PART NUMBER MTHH-C	
CUSTOMER DRAWING	
ITEM REVISION NAME	PANDUIT
N41130BS/02	
DATASET FILE NAME	MATERIAL: 304 STAINLESS STEEL
N41130BS/02	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.x ± .1 [2.54] .xxx ± .005 [.127]	
.xx ± .01 [.25] ANGLES ± 5 °	
THIRD ANGLE PROJECTION	
DRAWN BY	DATE
JAMB	DPN
CHK	SCALE
11/02	4:1
DRAWING NUMBER: N41130BS_DC	
SHT 1 OF 1	
SIZE A	

2

1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	10/03	BRH	DPN	JJB	^(A) ADDED ST3MT TO APPLICATION TOOL NOTE	11162
00	11/02	JAMB	DPN	JJB	^(B) ADDED TENSILE STRENGTH NOTE	10401
					DRAWING RELEASED	