

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
PNF 18-6FF-3K	#6	.80 (20.32)	.28 (7.11)	.19 (4.83)	.64 (16.26)	.15 (3.81)
PNF 18-8FF-3K	#8	.87 (22.10)	.31 (7.87)	.23 (5.84)	.68 (17.27)	.17 (4.32)
PNF 18-10FF-3K	#10	.86 (21.84)	.35 (8.89)	.23 (5.84)	.68 (17.27)	.20 (5.08)



1. UL LISTED AND CSA CERTIFIED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #22-18 AWG (0.5-1.5 mm²) SOLID
OR STRANDED, COPPER WIRE
2. INSTALLATION TOOLS :
 - A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-1
3. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
4. MATERIAL :
 - A. STAMPING - .03"(.8) THK COPPER, TIN PLATED
 - B. HOUSING - RED NYLON
 - C. SLEEVE - BRASS, TIN PLATED
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
6. WIRE STRIP LENGTH: 1/4 ^{+1/32}₋₀ (6.4 ⁺⁸₋₀)



LISTED
587H
E52164



CERTIFIED
LR31212

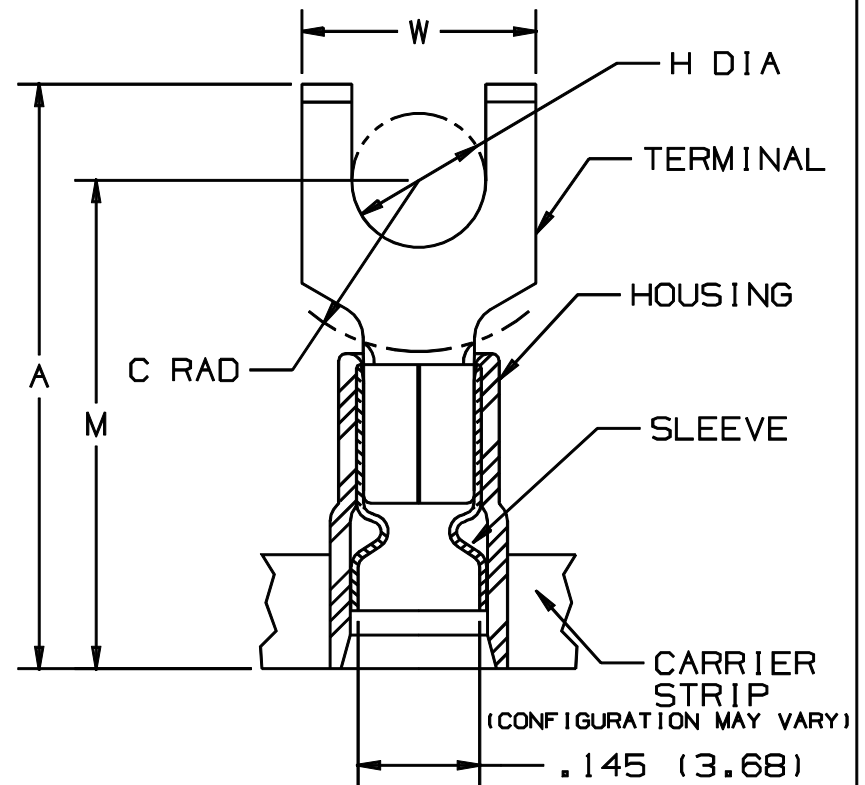

```

.145 (3.68)
  MAX WIRE
  INSUL DIA
.090 (2.29)
MIN. WIRE
INSUL. DIA.

```

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
06	1/01	KMD		CAD FILE SPEC. WAS N41202AA_PCD_05				TERMO 3PC. CONTINUOUSLY MOLDED NYLON (FUNNEL) INSULATED, 22-18 BARREL, FLANGED FORKS			
05	12/98	JAMB		ADDED DIM., "MIN. WIRE INSUL DIA."	05403						
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								FES	LA	NONE	A41202