

Model AL4190


Tilt Track System

- Up to 140 lb. load rating
- Customized Tilt Angle
- Easy to fit and fully adjustable

Track and
Track Roller



Wheel Roller
Assembly

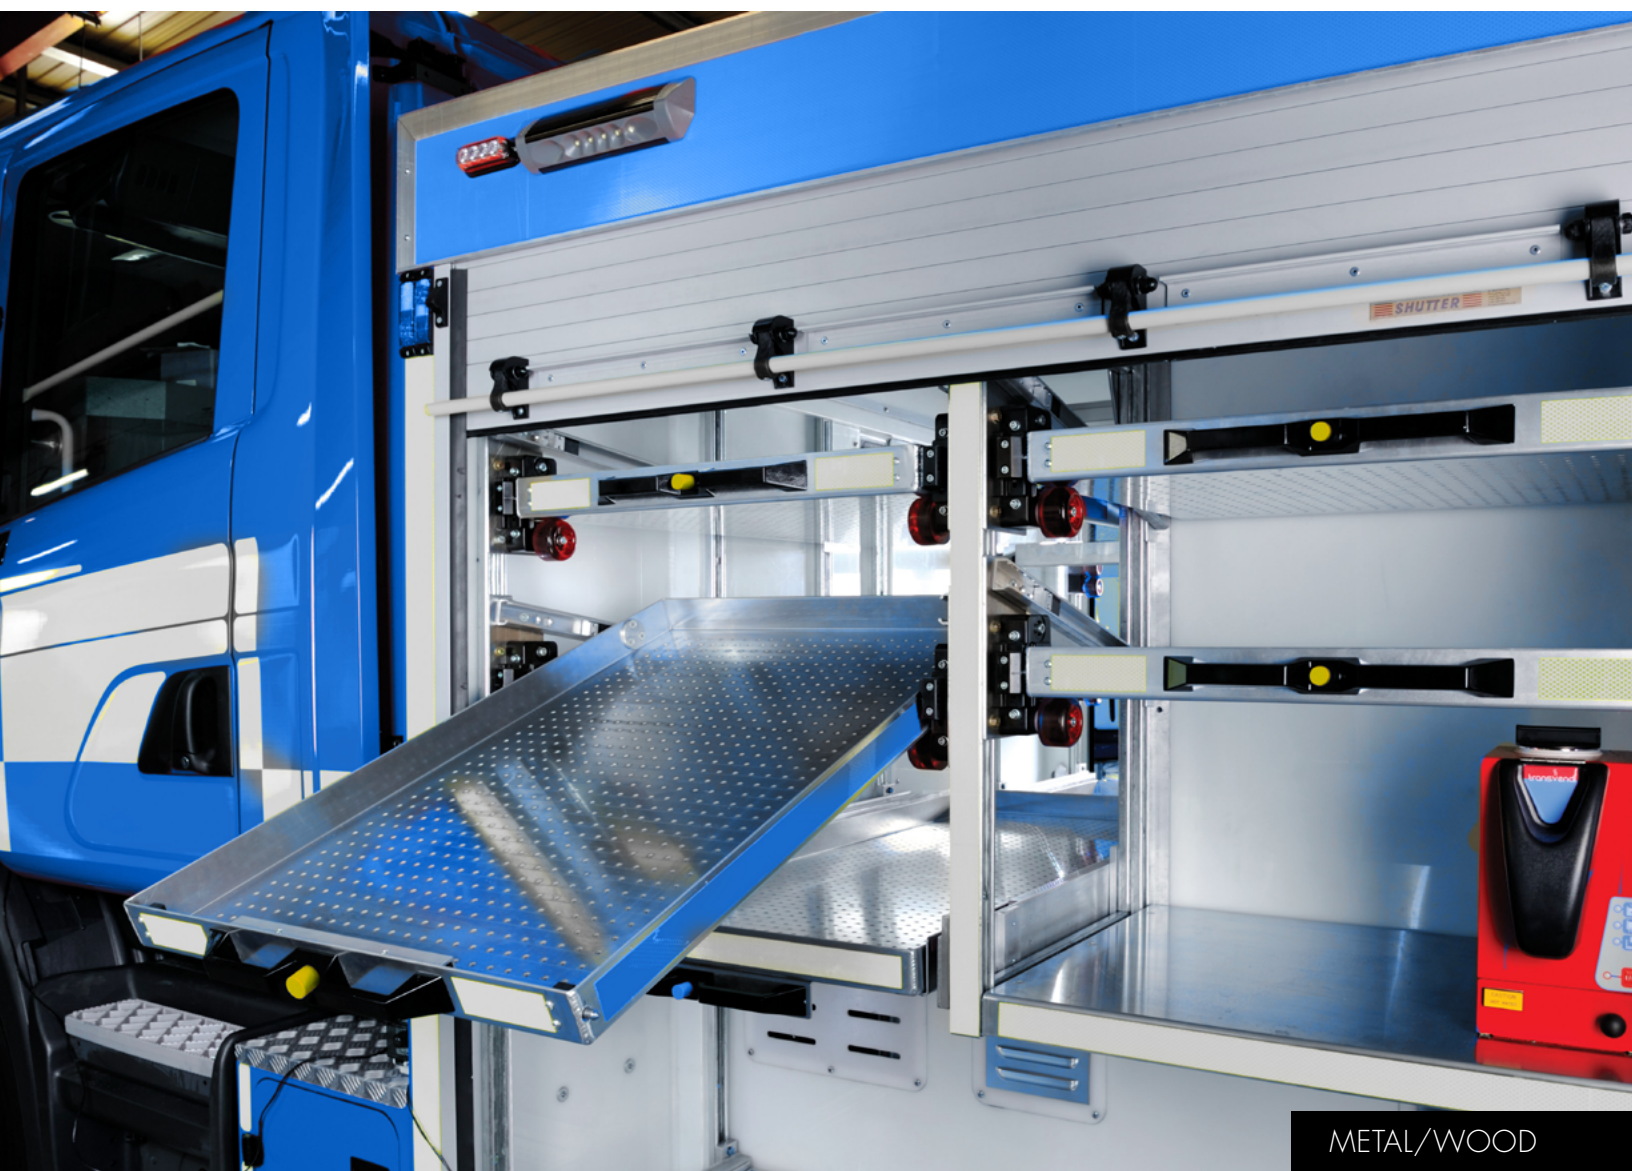

Model AL4190

Tilt Track System

Model AL4190 is a Tilt Track System that enables access to drawers or trays installed at shoulder level and above. The system uses wheels and rollers to extend the drawer, and an aluminum channel guides the back of the drawer upward as it slides out of the case, tilting the drawer downward for easy viewing and access to contents.

Applications

Applications include drawers and trays used for supply and equipment storage in emergency vehicles, warehouses and manufacturing facilities, retail fixtures, commercial kitchens, restaurants, medical facilities, and garages.


Features & Benefits

- **Tilt action** provides access to drawer contents at shoulder height and above.
- **Up to 140 lb.** load rating for durable performance.
- **Accommodates drawers up to 40" wide.**
- **Lightweight and corrosion-resistant** aluminum tracks available in lengths of 24" and 40" (dimensions approximate). Track can be cut down to customize length.
- **Angle of tilt** can be altered by the installer and varies depending on the angle of the track and positioning of the bumper stops.
- **Roller wheel assembly** smoothes movement and dampens tilt-down action, even when fully loaded. Adjustment to fit the drawer is achieved via adjustment screws at the front of the assembly.
- **Non-disconnect** for added strength and safety.
- Compatible with CBHand-2 Locking Handle Kit, which provides lock-in capability.


Components

Model AL4190 is sold as a kit that includes: 2 each aluminum tracks, wheel roller assembly, track rollers, and cover caps, and, 4 each bumper stops and end stops.

AL4190 cross section

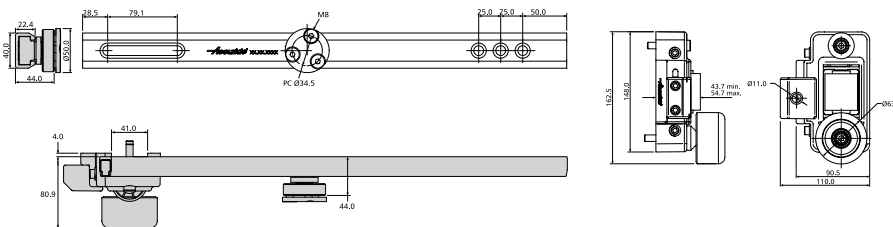

Authorized Distributor

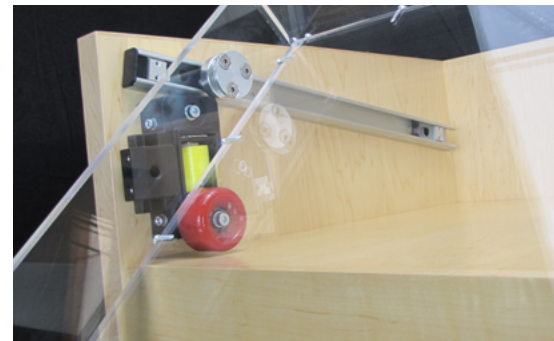

Accuride®

12311 Shoemaker Avenue
Santa Fe Springs, CA 90670
phone: 562.903.0200
fax: 562.903.0208
www accuride com

© 2016 Accuride International Inc. SS-ACAL4190-2K-1016