
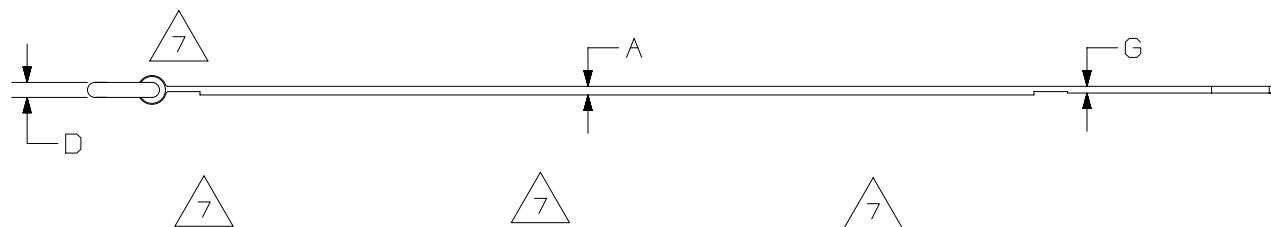


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DEDIMENTIAL TO THE INTERESTS OF PANDUIT CORP.

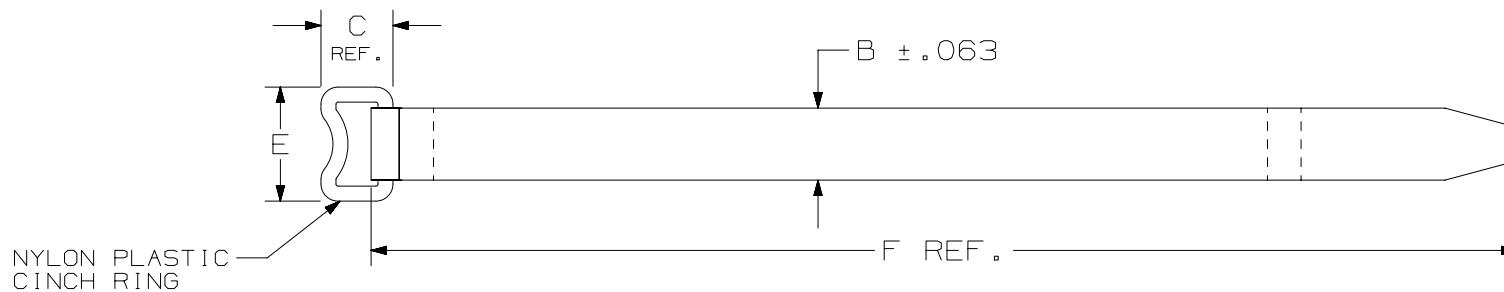

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION
	MIN. in (mm)	MAX. in (mm)									
HLC3S	2.0 (50.8)	3.0 (76.2)	.080 (2.0)	.750 (19.1)	.750 (19.1)	.183 (4.6)	1.10 (27.9)	12.0 (305)	.080 (2.0)	50 (222)	STANDARD
HLC5S	3.0 (76.2)	5.0 (127)	.080 (2.0)	.750 (19.1)	.750 (19.1)	.183 (4.6)	1.10 (27.9)	18.0 (457)	.080 (2.0)	50 (222)	STANDARD

## NOTES:

1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.  
2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.