
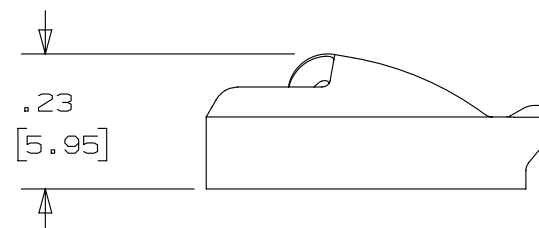
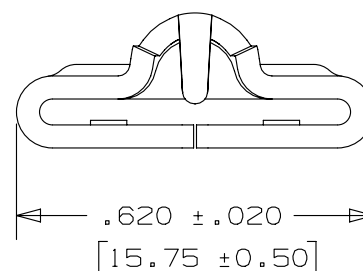
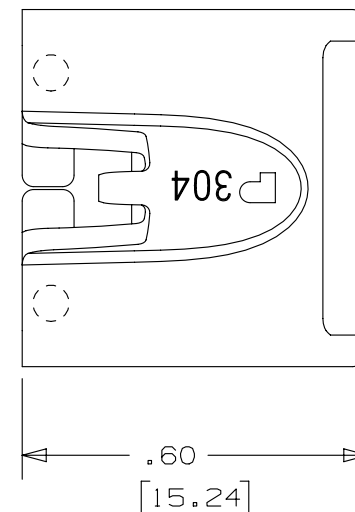


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBEH-TLR
2. INSTALLATION TOOLS: RT2HT, ST2MT, PBTMT, RT2HTN
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
4. MINIMUM LOOP TENSILE STRENGTH: 300 LBS (1335 newtons)
5. TOLERANCES:
 - .X = $\pm .030$ [.762]
 - .XX = $\pm .020$ [.508]
 - .XXX = $\pm .010$ [.254]
 - ANGLES = $\pm 2^\circ$
6. MATERIAL: 304 STAINLESS STEEL



TITLE					
METAL LOCKING TIE HEAD – EXTRA HEAVY DUTY FOR UNCOATED BANDING PART NO. MTHEH-C					
CUSTOMER DRAWING					
ITEM REVISION NAME					
N41211BS/02					
DATASET FILE NAME			MATERIAL: SEE NOTES		
N41211BS_DC/02A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			DRAWING NUMBER: N41211BS_DC		
 THIRD ANGLE PROJECTION					
DRAWN BY	DATE	CHK	SCALE	SIZE	
JAMB	9/16/05	EJD	3:1	SHT 1 OF 1	
				A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01049
01A	7/11	JAMB	MIM	---	REMOVED INSTALLATION TOOLS ST3MT. ADDED INSTALLATION TOOL ST2MT, PBTMT & RT2HTN	-----
00A	10/08	JAMB	SKB	---	ORIG CAD FILE SPEC WAS S41211-00. NOTE 2: APPLICATION TOOL RT1HT REPLACED BY RT2HT	-----
00	9/05	JAMB	EJD	---	DRAWING RELEASED	SS00053