



Heavy Duty Cable Management Solutions

Expert Solutions to Create Improved
Designs and Lower Total Installed Cost



Panduit is your wire management solutions partner for the harshest, heavy-duty applications

Panduit provides expertise, services and products for:

- Optimized wire management design
- New product development
- Problem solving and process improvement

Ideally suited for applications, including:

- Heavy Truck
- Construction Equipment
- Agricultural Equipment
- Bus
- Specialty Trucks, such as Dump Trucks, Concrete Trucks, Utility Trucks

Draw on our expertise to help you reduce wire management costs and hassle!

Expertise to engineer profitability

Engineers face cable management decisions impacting the performance, quality and migration plans of their vehicle platforms. Panduit is equipped to help. Let our expertise and robust heavy duty cable management products help you lower total installed costs.



Consultative Engineering

For the many design decisions and application issues encountered, help is needed to identify the cable management products best suited for each application. Panduit provides consultative engineering assistance and best practice sharing to engineers working on Truck, Bus and Heavy Equipment applications.



Innovative New Products

Panduit has expanded our offering of robust heavy duty cable management products to cover even more applications for OEM Truck, Bus and Heavy Equipment manufacturers. Always innovating, Panduit continues to design and launch new products for these demanding applications.



Tooling Support

In addition to a broad range of application specific heavy duty cable management products, Panduit also offers installation tooling and tooling services to meet the highest OEM specifications



Heavy Duty Cable Management Solutions

Whether you design systems for agricultural machinery or heavy-duty construction equipment, your electrical connections are continuously subjected to extreme conditions and harsh environments. They can break down quickly - unless each and every component can withstand the rigors of your challenging operating environment. Panduit can help you avoid downtime, costly rework or even equipment recalls. We offer the widest range of products specifically designed for your toughest challenges, from severe temperatures and vibration to extreme mechanical stress.




Cable Ties

Page 6-7



Chassis Mount Ties and Spacers

Page 8



Stud Mounts

Page 9





Our R&D capabilities offer world-class products that are designed to meet or exceed industry standards. Look to Panduit engineered solutions to solve your manufacturing problems, application needs, and new product development to reveal new opportunities for operational efficiencies and cost-savings. Partner with Panduit and keep your systems operating dependably. We're wired for the way you work.

- 

Tie Mounts
Pages 10
- 

Swivel Mounts, Cable Spacer, Clamps
Page 11
- 

Fir Tree Mounts
Page 12
- 

Cable Tie Tools
Page 13
- 

Complete Your Bundle
Page 14-15

Heavy Duty Double Clamp Cable Ties

Double Clamp Cable Ties

The Double Clamp cable ties provide a cost effective way to secure and separate parallel hoses, tubing, wires and wiring bundles in an easy to install one-piece design. The Double Clamp cable tie has a strong 150 lbs. loop tensile strength to



provide secure support for even high load applications. This new cable tie is ideal for heavy duty applications such as Truck and Heavy Equipment.

Part Number	Max. Bundle Dia.		Length		Width		Thickness		Min. Loop Tensile		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	N			
PLDC1.5EH-C350	1.3	33	13.1	332.7	0.5	12.73	0.057	1.5	150	667.2	GS4EH-E, GTH-E*, PPTEH	100	500
PLDC2.5EH-C350	2.3	58.4	19.28	489	0.5	12.73	0.057	1.5	150	667.2	GS4EH-E, GTH-E*, PPTEH	100	500

* GTH-E tools starting with Date Code L18 now cut through these Double Clamp ties (PLDC1.5EH and PLDC2.5EH). Date Code is etched on the red trigger handle. These tools come equipped with a wider blade that will cut through these extra heavy thin ties. Tools prior to the L18 date code do not have the wide blade.

Double Loop Cable Ties

Applications

- Underhood hose and harness routing
- Areas where bundles must be secured parallel to each other or another element



Solution


Looking for a labor saving alternative to butterfly cushioned clamps when securing hoses and wire bundles? Panduit's Multiple Loop Cable Ties are the perfect solution

Features

- Offers multiple loop capability
- Prevents bundle damage with a strap body that spreads the clamping forces
- Provides high tensile strength to route bundles securely
- Installs easily by hand - uses Panduit tooling for repeatable tension and cutoff
- Reduces part number inventory with a single product to cover multiple bundle sizes

Part Number	Max. Combined Bundle Dia. D1 + D2		Length		Width		Thickness		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	N			
Light-Heavy Cross Section													
PLB4H-TL	3.60	91	14.7	373	0.300	7.6	0.075	1.9	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
Weather Resistant Nylon 6.6 - Light-Heavy Cross Section													
PLB4H-TL0	3.60	91	14.7	373	0.300	7.6	0.075	1.9	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
Weather Resistant Nylon 6.6 - Standard Cross Section													
PLB2S-C0	1.80	46	7.6	193	0.190	4.8	0.052	1.3	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	100	1000
PLB3S-C0	3.00	76	11.8	300	0.190	4.8	0.052	1.3	50	222			
PLB4S-M0	4.10	104	14.8	376	0.190	4.8	0.052	1.3	50	222			1000

Triple Loop Cable Ties

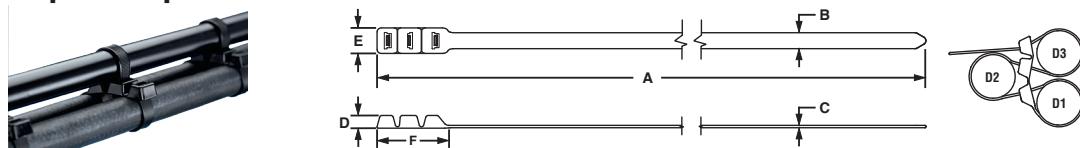

Part Number	Max. Combined Bundle Dia. D1 + D2 + D3		Length		Width		Thickness		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	N			
Extra-Heavy Cross Section													
PL3B5EH-C0	5.00	127	20.0	508	0.500	12.7	0.075	1.9	125	556	GS4EH-E, ST3EH	100	1000

Heavy Duty Wide Strap Cable Ties

Wide Strap Extra Heavy Cable Ties

The Wide Strap Extra Heavy cable ties provide an easy to install way to secure hoses, tubing, wires and wiring bundles. These cable ties feature a wide, thin body that is more flexible and easier to install than the typical Heavy and Extra-Heavy Cross section ties. The Wide Strap Extra Heavy cable tie has a strong 120 lbs. loop tensile strength to provide secure support for even high load applications. This new cable tie is ideal for heavy duty applications such as Truck and Heavy Equipment.



Key Features and Benefits

Flexible Strap Body: Flexible cable tie body provides easier insertion and installation than other heavy and extra heavy cross section cable ties.

Minimizing Pinching: The wide .5" design of the cable tie body minimizes pinching on hoses and tubing compared with typical cable ties.

Versatile Material: New Nylon 6/6 material is Heat stabilized (115° C), UV weather resistant and impact modified.

Part Number	Max. Bundle Dia.		Length		Width		Thickness		Min. Loop Tensile		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
PLWS2EH-TL350	2.25	57.15	9.1	231.10	0.5	12.7	0.055	1.4	120	533.8	GS4EH-E, GTH-E* PPTEH	250	2,500
PLWS3EH-TL350	3.25	82.55	12.1	307.34	0.5	12.7			120	533.8	GS4EH-E, GTH-E* PPTEH	250	2,500
PLWS4EH-TL350	4.125	104.775	15.1	383.54	0.5	12.7			120	533.8	GS4EH-E, GTH-E* PPTEH	250	2,500

* GTH-E tools starting with Date Code L18 now cut through these Wide Strap ties (PLWS2EH, PLWS3EH, PLWS4EH). Date Code is etched on the red trigger handle. These tools come equipped with a wider blade that will cut through these extra heavy thin ties. Tools prior to the L18 date code do not have the wide blade.

Panduit Cable Tie PLT4H - Flexible Heavy Cross Section

Provides excellent tensile strength that is expected with a Heavy Cross Section design. These cable ties install quickly and more easily than the typical Heavy Cross section ties. This innovative design allows no-slip gripping of the tip along with the ability to cinch with one hand. Installation with Panduit GTH-E or GS4H-E cable tie hand tools provides faster installation, exact bundle tension and smooth tie cut off. This flexible heavy cross section is ideal for heavy duty applications such as Truck, Bus, and Heavy Equipment.



Key Features and Benefits

Flexible Strap Body: Allows installation of the cable with one hand.

Improved Tip Design: No-slip gripping of tail on initial insertion.

Flexible Locking Design: Provides a low thread force for quick and easy installation to improve productivity and worker safety.

Lower Tool Tension Settings Required: Easier, faster installation with lower installer effort to install ties to proper tension settings.

Material Options: Available in both weather resistant (-0) and heat stabilized (-30) materials for application versatility.

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Material	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
PLT4H-TL0/147	14.5	368	0.300	7.6	0.060	1.5	4.11	104.5	120	534	Weather resistant nylon 6.6	250	2500
PLT4H-TL30/147	14.5	368	0.060	7.6	0.060	1.5	4.11	104.5	120	534	Heat stabilized nylon 6.6	250	2500

Chassis Mount Ties and Spacer

Applications


- Run cable and hose along the frame rails
- Secure a bundle under a chassis assembly
- Manage wire harnesses in the cab and sleeper
- Use a through-hole in frame/chassis to mount
- Maintain a standoff from the frame rail in Chassis Tie applications

Solution

Panduit Sta-Strap™ Classic Mount Ties are uniquely designed to secure a bundle directly to a chassis or panel utilizing a through hole

Features

- Eliminates the need for separate fasteners to reduce costs and decrease installation time
- Remains adjustable and reusable until tie is tensioned and cut-off
- Installs easily with Panduit hand-operated tools.
- Engages clearance hole with optional centering pilot (2 designs) to prevent tie from shifting or abrading during vehicle operation

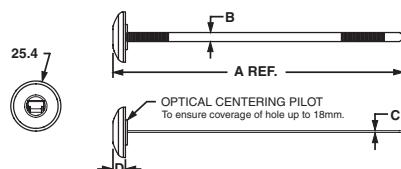

Part Number	Length		Width		Thickness		Hole Diameter Range		Max. Bundle Dia. In.	Min. Loop Tensile Str. Lbs. N	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	
	In.	mm	In.	mm	In.	mm	In.	mm						
Without Centering Pilot														
SSPM2.5H-L300	10.1	257	0.300	7.6	0.062	1.6	0.316 – 0.820	8.0 – 21.0	2.76	70	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50 2500
SSPM4H-L300	14.8	376	0.300	7.6	0.062	1.6	0.316 – 0.820	8.0 – 21.0	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50 2500
With Centering Pilot														
SSPM2.5HP-L300	10.1	257	0.300	7.6	0.062	1.6	0.440 – 0.820	11.2 – 21.0	2.76	70	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50 2500
SSPM4HP-L300	14.8	376	0.300	7.6	0.062	1.6	0.440 – 0.820	11.2 – 21.0	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50 2500
With Long Centering Pilot														
SSPM4HLP-TL300	14.8	376	0.300	7.6	0.062	1.6	0.440 – 0.820	11.2 – 21.0	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250 2500

Part Number (mm)	Cable Tie Channel (A) in. (mm)	Width (B) in. (mm)	Standoff Height (C) in. (mm)	Base Depth (D) in. (mm)	Recommended Panel Hole Diam. (E) in. (mm)	Std Pkg. Qty.	Std Ctn. Qty.
TMSH50-T300	0.310 (7.875)	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	.50 (12.7)	100	1000

Legacy Stud Mounts

Features

- Easily applied to bolts or studs with a light hammer blow or turing of the mount
- Designed for use with cable ties to route and secure cable bundles, air, water, and hydraulic lines



Part Number (mm)	Used with Cable Ties	Material	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty
TMSTLHS6-M0	M, I, S, HS, LH	Impact modified weather resistant nylon 6.6	Black	Outdoors or Indoors	1/4" stud dia. (6mm)	1000	5000
TMSTLHS8-M0					5/16" stud dia. (8mm)		
TMSTHS10-D0					3/8" stud dia. (10mm)	500	–
TMSTHS11-D0					7/16" stud dia. (11mm)		
TMSTHS12-D0					12mm stud dia.		
TMSTHS13-D0					1/2" stud dia. (13mm)		
TMSTHS16-D0					5/8" stud dia. (16mm)		
TMSTHS19-D0					3/4" stud dia. (19mm)		

Stud Mounts

Applications

- Run cable and hose along the frame rails
- Secure a bundle under a chassis assembly
- Manage wire harnesses in the cab, sleeper and trailer
- Use exposed threads from fasteners already in the vehicle
- Maintain a standoff from the frame to avoid bundle abrasion

Solution

Panduit Cable Tie Stud Mounts are designed to utilize threaded fasteners already present in the vehicle. These easy-to-use wiring accessories can be easily applied with light threading them onto the fastener, or by using Panduit's specialized application tool. Use these mounts with a variety of Panduit cable ties.

Features

- Installs onto fasteners such as bolts, Huck® fasteners and welded studs
- Fits a wide variety of common stud sizes and cable ties



- Offers multiple position configurations for flexibility in application
- Installs faster than metal clamps with threaded fasteners
- Stands up to tough application environments with a weather-resistant nylon 6.6 material
- Provides a standoff from the frame rail to help prevent bundle abrasion during vehicle operation
- Stands up under vibration
- Secures bundle with Panduit cable ties – up to 4 discrete bundles per mount
- Remains in vehicle during service or repair – reattach bundle with new cable ties
- Twist-on stud mount design has a stopping feature that insures the part reaches a fixed stopping point on the bolt and does not allow the stud to protrude into the area where the bundle would mount.
- Manage three bundles with one mount that is either bolted to a surface or installed on a threaded stud.

Part Number	Used with Cable Ties*	Material	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty	
TMSTEHS5-D350	M, I, S, HS, LH, H, EH, WS	Impact modified heat stabilized weather resistant nylon 6.6	Black	Outdoors or Indoors	Hammer-On - 5mm stud dia.	500	-	
TMSTEHS6-D350					1/4" stud dia. (6mm)			
TMSTEHS8-D350					Hammer-On - 5/16" stud dia. (8mm)			
TMSTEHS10-D350					Hammer-On - 3/8" stud dia. (10mm)			
TMSTEHS11-D350					Hammer-On - 7/16" stud dia. (11mm)			
TMSTEHS12-D350					Hammer-On - 12mm stud dia.			
TMSTEHS13-D350					Hammer-On - 1/2" stud dia. (13mm)			
TMSTEHS16-D350					Hammer-On - 5/8" stud dia. (16mm)			
TMSTEHS19-D350					Hammer-On - 3/4" stud dia. (19mm)			
TMST-TOOL	Description: Tool used to install Twist-On Stud Mounts with user supplied drill.						5	50

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, H = Heavy

*TMST-TOOL is used with the "Twist-On Stud Mounts" only

Bolt-On Stud Mounts

Features

- Manage three bundles with one mount that is either bolted to a surface or installed on a threaded stud.
- Bolt on design style product has suitable mechanical strength to resist 120 in-lbs of torque that is applied on the bolt.

- Bolt on design allows the bolt to extend beyond the height of the part.



Part Number	Used with Cable Ties*	Material	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty
TMSTEHS6B-D350	M, I, S, HS, LH, H, EH, WS	Impact modified heat stabilized weather resistant nylon 6.6	Black	Outdoors or Indoors	Bolt-On 1/4" stud dia. (6mm)	500	-
TMSTEHS8B-D350					Bolt-On - 5/16" stud dia. (8mm)		

Extra Heavy Tie Mounts

Panduit offers many accessories for mounting the Wide Strap Extra Heavy cable ties, including: extra-heavy screw applied cable tie mounts (TMEH2), In addition to these accessories, the Wide Strap Extra Heavy cable ties are also available pre-assembled with mounting accessories: Extra Heavy Mounts.



Part Number	Used with Cable Ties‡	Material	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty
TMEH2S5-D350	M, I, S, HS, LH, H, EH PLWS3EH-TL350 Wide Strap Cable Tie pre-installed	Impact modified heat stabilized weather resistant nylon 6.6	Black	Outdoors or Indoors	#10 (M5) Screw	500	2,000
TMEH2S6-D350					1/4 (M6) Screw	500	2,000
TMEH2S8-D350					5/16 (M8) Screw	500	2,000
TMEH2S5-3E-C350					#10 (M5) Screw	100	1,000
TMEH2S6-3E-C350					1/4 (M6) Screw	100	1,000
TMEH2S8-3E-C350					5/16 (M8) Screw	100	1,000

High and Medium Torque Tie Mounts


A retention tab within the mount bolt hole creates interference to hold the bolt in different positions without any external assistance.



Part Number	Used with Cable Ties‡	Material	Torque (ft-lbs)	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty		
TMEH4S8-D350	M, I, S, HS, LH, H, EH, WS	Impact modified heat stabilized weather resistant nylon 6.6 with zinc plated steel insert	114	Black	Outdoors or Indoors	5/16" (8mm) bolt	500	—		
TMEH4S10-D350						3/8" (10mm) bolt				
TMEH4S13-D350		Impact modified heat stabilized weather resistant nylon 6.6				1/2" (13mm) bolt				
TMEH3S8-D350		40				5/16" (8mm) bolt				
TMEH3S10-D350						3/8" (10mm) bolt				
TMEH3S13-D350						1/2" (13mm) bolt		1,000		

Screw Applied Tie Mounts

- Unique cradle design provides maximum stability for cable bundle
- Route and support large diameter and heavy cable bundles.

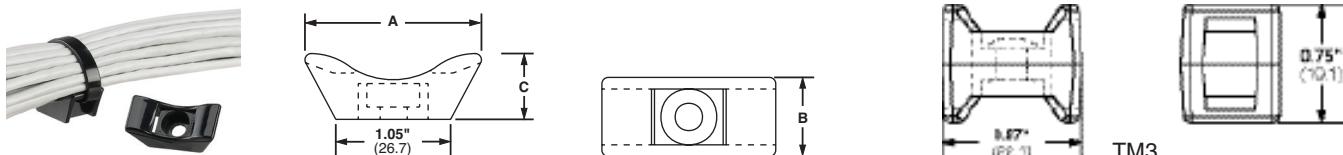


Part Number	Used with Cable Ties‡	Material	Color	Environment	Mounting Method	Std Pkg. Qty	Std Ctn. Qty
TMEH-S8-Q0	M, I, S, HS, LH, H, EH	Weather Resistant Nylon 6.6	Black	Outdoor	#8 (M4) Screw	25	250
TMEH-S10-Q0					#10 (M5) Screw	25	250
TMEH-S25-Q0		Weather Resistant Polypropylene			1/4 (M6) Screw	25	250
TMEH-S10-C100		Green	Indoor	#10 (M5) Screw	100	500	
TMEH-S10-C109				Polypropylene	#10 (M5) Screw	100	500
TM3S8-C	M, I, S, LH		Natural	Indoor	#8 (M4) Screw	100	500
TM3S10-C					#10 (M5) Screw	100	500
TM1S6-M0	M	Weather Resistant Nylon 6.6	Black	Outdoor	#6 (M3) Screw	1000	5000
TM2R6-M0					3/16 Rivet		
TM2S6-M0	M, I, S				#6 (M3) Screw		
TM2S8-M0					#8 (M4) Screw		
TM3R6-M0					3/16 Rivet		
TM3S10-M0	M, I, S, LH				#10 (M5) Screw	1000	5000
TM3S25-M0					1/4 (M6) Screw		



‡Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, H = Heavy, EH = Extra-Heavy

Swivel Mounts

- The two mounts are securely fastened together with a connecting rivet that allows both mounts to rotate
- Can join bundles of cable, tubing, or hoses that may need to move or are not parallel



- Separates bundles to avoid abrasion
- Material: Weather Resistant Nylon 6.6



Part Number	Used with Cable Ties‡	Pull Apart Force		Color	Environment	Std. Pkg. Qty.	Std. Ctn. Qty.
		Lbs.	g				
TM3-X2-C0Y	M, I, S, HS, LH	120	54,431	Black	Indoors/Outdoors	100	1000
TMEH-X2-L0Y	M, I, S, HS, LH, H, EH	250	113,398			50	500

Cable Spacer



Panduit® Cable Spacers are designed to accommodate hoses or cable bundles while maintaining separation. The spacers work with Panduit® Cable Ties up to heavy crosssection.



Part Number	Color	Dimensions				Environ.	Max. Continuous Use Temp.	CE Compliant	RoHS Compliant	Min. Order Qty.				
		Height mm	Length		Width									
			mm	In.	mm	In.								
CSEH15A30-C0	Black	0.38	39.9	1.57	20	0.79	Indoor	-40°F (-40°C) – 185°F (85°C)	No	Yes	100			

Pan-Clamp™ Heavy Duty Fixed Diameter Clamps

- One-piece design significantly reduces installation time
- Integrated ribs prevent rotation of cable bundles and ensures secure grip on hoses
- Material: Impact modified Weather Resistant Nylon 6.6



Part Number	Max. Bundle Diameter A		Width B		Bundle Offset C		Max. Panel Thickness		Panel Hole Diameter		Color	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
PC038-H25D-C0	0.38	9.5	0.62	15.7	0.64	16.3	0.13	3.2	0.28	7.1	Black	100	500
PC050-H25D-C0	0.50	12.7	0.62	15.7	0.71	17.9	0.13	3.2	0.28	7.1		100	500
PC062-H25D-C0	0.63	15.8	0.62	15.7	0.77	19.5	0.13	3.2	0.28	7.1		100	500
PC075-H25D-C0	0.75	19.1	0.62	15.7	0.83	21.1	0.13	3.2	0.28	7.1		100	1000
PC087-H25D-C0	0.88	22.1	0.62	15.7	0.89	22.7	0.13	3.2	0.28	7.1		100	1000
PC100-H25D-C0	1.00	25.4	0.62	15.7	0.96	24.3	0.13	3.2	0.28	7.1		100	1000
PC112-H25D-C0	1.13	28.5	0.62	15.7	1.02	25.8	0.13	3.2	0.28	7.1		100	1000
PC125-H25D-C0	1.25	31.8	0.62	15.7	1.08	27.4	0.13	3.2	0.28	7.1		100	1000



Fir Tree Push Mounts

- Unique alternating barb design
- Lock securely into position
- Umbrella tensioning



- Exclusive contoured anvil head

- Material: Heat Stabilized Nylon 6.6
- Heavy Duty Fir Tree Mount for use with Wide Strap Cable Ties*

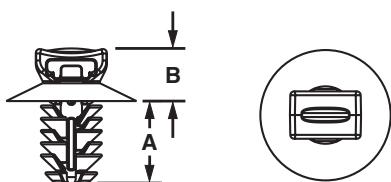

Part Number	Used with Cable Ties‡	Material	Head Diameter		Panel to Top of Mount		Overall Height		Panel Hole Diameter Range		Panel Thickness Range		Std. Pkg. Qty.	Std. Ctn. Qty.
			In.	mm	In.	mm	In.	mm	In.	mm	In.	mm		
PUM-049-M30	M, I, S	Heat stabilized weather resistant Nylon 6.6	0.67	17.0	0.26	6.6	0.54	13.8	0.18 – 0.19	4.6 – 4.9	0.03 – 0.19	0.7 – 3.0	1000	5000
PUM-071-M30	M, I, S		0.67	17.0	0.26	6.5	0.67	16.9	0.25 – 0.28	6.3 – 7.1	0.03 – 0.28	0.8 – 7.0	1000	5000
PUM-100-M30	M, I, S		0.64	16.0	0.26	6.5	0.67	16.9	0.35 – 0.40	9.0 – 10.0	0.03 – 0.28	0.8 – 7.0	1000	5000
PUM-925-M30	M, I, S, LH		0.77	20.0	0.30	7.6	1.05	26.7	0.34 – 0.36	8.8 – 9.3	0.04 – 0.62	1.0 – 16.0	1000	5000
PUME925-D350 *NEW!	M, I, S, LH, H, EH	Impact modified heat stabilized weather resistant nylon 6.6	1.00	25.4	0.317	8.0	1.15	29.2	0.34 – 0.36	8.8 – 9.3	0.04 – 0.62	1.0 – 16.0	500	5000

‡Cable Tie Cross Section Sizes: M = Miniature, S = Standard, I = Intermediate, LH = Light-Heavy, H = Heavy, and EH = Extra Heavy.

Fir Tree Push Mount Assemblies

- Cable tie/mount assemblies significantly reduce installation time compared to loose parts
- Fewer parts throughout the manufacturing/assembly process
- Heat Stabilized Nylon 6.6 standard on cable ties and mounts
- Heavy Duty Fir Tree Mount assemblies with Wide Strap Cable Ties*




Part Number	Material	Head Diameter		Panel to Top of Mount		Overall Height		Panel Hole Diameter Range		Panel Thickness Range		Max. Bundle Diameter		Std. Pkg. Qty.	Std. Ctn. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm		
PUM-049-2S-D30 ^	Heat stabilized weather resistant Nylon 6.6	0.67	17.0	0.26	6.6	0.54	13.8	0.18 – 0.19	4.6 – 4.9	0.03 – 0.19	0.7 – 3.0	1.88	48.0	500	5000
PUM-071-2S-D30 ^		0.67	17.0	0.26	6.6	0.67	16.9	0.25 – 0.28	6.3 – 7.1	0.03 – 0.28	0.8 – 7.0			500	5000
PUM-100-2S-D30 ^		0.64	16.0	0.26	6.6	0.67	16.9	0.35 – 0.40	9.0 – 10.0	0.03 – 0.28	0.8 – 7.0			500	5000
PUM-925-3H-T30 ^^		0.77	20.0	0.30	7.6	1.05	26.7	0.34 – 0.36	8.8 – 9.3	0.04 – 0.62	1.0 – 16.0	3.00	76.0	200	1000
PUME925-3E-C350 *NEW!	Impact modified heat stabilized weather resistant nylon 6.6	1.18	30.0	0.275	7.0	1.10	28.0	0.34 – 0.36	8.8 – 9.3	0.04 – 0.62	1.0 – 16.0	3.25	82.6	100	1000
PUME925-4E-C350 *NEW!												4.13	105	100	1000

^ Includes PLT2S Cable ties. ^^ Includes PLT3H Cable ties. * Includes Wide Strap PLWSXXX-TL350 Cable ties.

Stud Mounted Cable Ties – Heat Stabilized and Heat Stabilized Weather Resistant Nylon 6.6

- Heat stabilized material for high temperature applications up to 239°F (115°C) – indoor use
- Heat stabilized weather resistant material has greater resistance to damage caused by ultraviolet light and for high temperature applications up to 293°F (115°C) – indoor or outdoor use
- Integral mount pushes onto a threaded stud and tie wraps around bundle
- Mid-mount style (PLST_SC) centers the wire bundle over the stud
- Tie can be removed from the stud by turning counterclockwise
- Releasable style available (PRST)
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

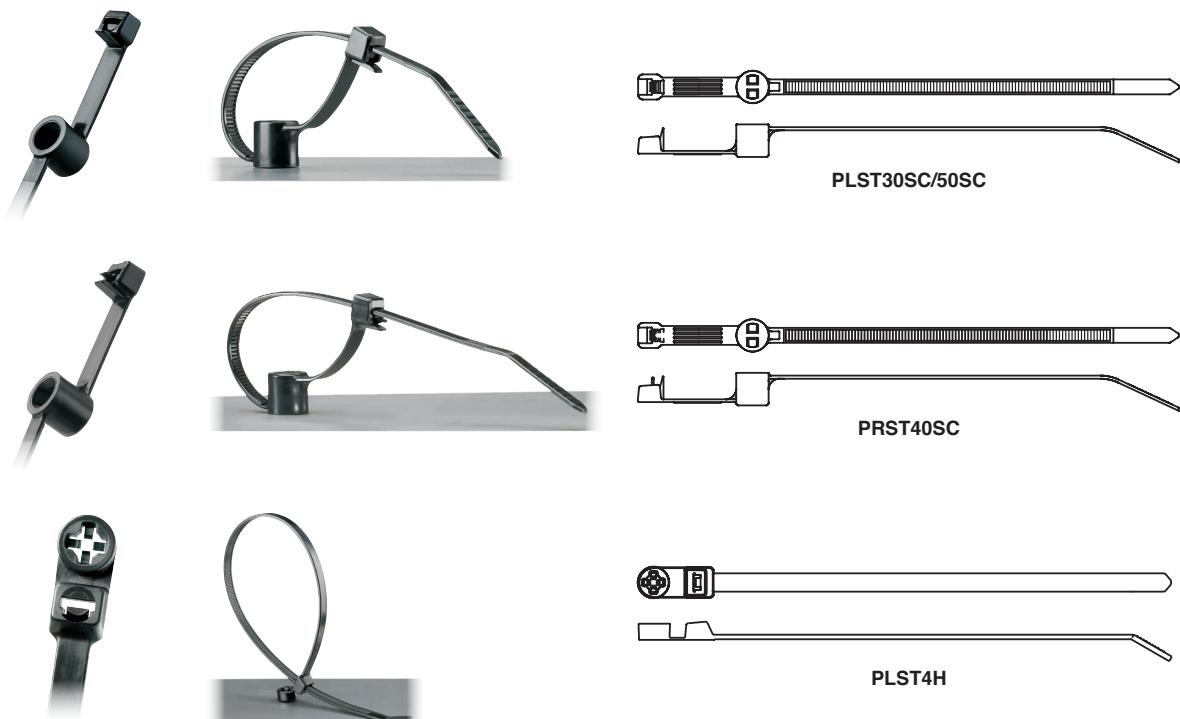

Part Number	Length		Width		Thickness		Recommended Stud Size		Max. Bundle Diameter		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N				
Heat Stabilized Nylon 6.6																
Standard Cross Section																
PLST30SC-D30	5.7	146	0.190	4.8	0.050	1.3	10-24	5.0	1.18	30	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	500	5000	
PLST50SC-D30	8.1	207	0.190	4.8	0.050	1.3	10-24	5.0	1.97	50			Hand install only			
PRST40SC-D30	6.9	176	0.190	4.8	0.050	1.3	10-24	5.0	1.57	40						
Heat Stabilized Weather Resistant Nylon 6.6																
Light-Heavy Cross Section																
PLST4HS25-TL300	15.3	389	0.300	7.6	0.075	1.9	1/4-20	6.4	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500	

Note: UL Recognized and CSA Certified except PLST4H.

Ergonomic Metal Cable Tie Hand Tools

Cable Tie Tools – Tool Controlled Tension and Cut-Off

- Used in production, maintenance, or construction applications
- Tool controlled tension provides flush cut-off and speeds installation to lower installed cost
- Lightweight and balanced
- Easy to change tension adjustment and easy to operate
- A combination of design, operation, and construction features, provides a long service life
- Replacement blades available
- No special maintenance required

Key Features and Benefits

- Improved cable tie cut-off mechanism that minimizes the impact to the installer's hand by more than 40% – the lowest in the industry
- Low handle force required to cut-off the cable tie – 15% lower handle force than comparable tools



Pneumatic Hand Tools – Tool Controlled Tension and Cut-Off

- Pneumatic, push button operation tensions and cuts off excess tie in a fraction of a second
- Durable, lightweight, ergonomic design is easy to operate and designed to reduce operator fatigue
- Easy to change tension adjustment
- Operates on non-lubricated air, without special maintenance



Part Number	Used with Cable Ties	Weight		Part Features	Standards	Std. Pkg. Qty.
		Oz.	g			
GTS-E	SM, M, I, S	10.4	294	Manual-operated tool. Impact resistant resin housing, dark gray color. Black-colored trigger handle, cushion handle and tension selector knob.	QPL per Mil. Std. SAE AS81306 and Mil. Spec SAE AS90387 Mil. Spec. Part Number MS90387-1	1
GS2B-E	SM, M, I, S	13.6	385.6	Manual-operated tool. Metal housing, light gray color. Black-colored trigger handle, cushion handle and tension selector knob.	QPL per Mil. Std. SAE AS81306 and Mil. Spec SAE AS90387 Mil. Spec. Part Number MS90387-1	
GTH-E	S, HS, LH, H, EH (thin *)	11.9	337	Manual-operated tool. Impact resistant resin housing, dark gray color. Red-colored trigger handle, cushion handle and tension selector knob.	QPL per Mil. Std. SAE AS81306 and Mil. Spec. SAE AS90387 Mil. Spec. Part Number MS90387-2	
GS4H-E	S, HS, LH, H	15.4	435	Manual-operated tool. Metal housing, light gray color. Red-colored trigger handle, cushion handle and tension selector knob.	QPL per Mil. Std. SAE AS81306 and Mil. Spec SAE AS90387 Mil. Spec. Part Number MS90387-2	
GS4EH-E	LH, H, EH	15.4	435	Manual-operated tool. Metal housing, light gray color. Blue-colored trigger handle, cushion handle and tension selector knob.	QPL per Mil. Std. SAE AS81306 and Mil. Spec SAE AS90387 Mil. Spec. Part Number MS90387-4	
PTS	SM, M, I, S	17.3	490	Pneumatic-operated tool. Impact resistant resin housing, dark gray color. Black-colored trigger, cushion handle and tension selector knob.	N/A	
PTH	S, HS, LH, H	32.0	907	Pneumatic-operated tool. Impact resistant housing, dark gray color. Red-colored trigger, cushion handle and tension selector knob.	N/A	

Cable tie cross section sizes: SM = Subminiature, M = Miniature, I = Intermediate, S = Standard, HS = Heavy Standard, LH = Light Heavy, H = Heavy, EH = Extra-Heavy. Note: All pneumatic hand tools require the PPH10 hose and PL289N1 filter/regulator for proper operation.

* GTH-E tools starting with Date Code L18 now cut through Extra-Heavy thin ties (PLWS2EH, PLWS3EH, PLWS4EH, PLDC1.5EH, PLDC2.5EH). Date Code is etched on the red trigger handle. These tools come equipped with a wider blade that will cut through these Extra-Heavy thin ties. Tools prior to the L18 date code do not come with the wide blade and will not cut these ties.

Complete Your Bundle



Cable Ties

Panduit cable ties are designed to exceed industry standards for use in high-vibration areas. Available in a wide range of materials, styles and sizes to meet your internal and external temperature applications.

- External tooth design on select styles for improved abrasion-resistance to wires, cables and hoses
- Metal barb styles for added tensile strength and increased bundle diameter variations
- Push mount and fir tree barb style ties for specialty applications
- Unique designs, such as wide strap and dual-clamp ties, improve reliability and productivity



Cable Accessories

Mounts and other devices help secure wire, cable and hose bundles – making installation more efficient and cost effective.

- Installation styles, such as push barb, stud mount and bolt/screw, help tailor cable routing and management
- Adhesive options for mounting to surfaces in interior and exterior applications
- Most styles are available in a variety of materials for high temperature, UV resistant and general purpose applications



Stainless Steel Cable Ties

Stainless-steel cable ties can bundle, fasten and secure cables and hoses that are exposed to corrosive or harsh conditions. Ties are built to last, helping reduce periodic rework.

- Self-locking cable ties enable faster installation
- Fully coated ties help prevent corrosion between dissimilar metals
- Smooth surfaces and rounded edges protect the cable bundle and the installer for improved safety, productivity and reliability



Cable Identification

Complete labeling systems – including time-saving labeling software, easy to use printers, high-end metal marker plates and heat shrink labels – help minimize installation time and ensure high-quality wire and cabling identification in demanding environments.

- Software simplifies label creation
- Outdoor rated and water-resistant label options
- Handheld and desktop printers allow for fast and high-quality label production
- Custom, imprinted cable ties available in multiple styles, sizes and colors



Abrasion Protection

A broad range of abrasion protection products for wire, cable and tubing meet your unique application requirements and today's most demanding safety standards.

- Braided, expandable sleeving fully covers wires while allowing heat dissipation
- Spiral wrap creates bundles to provide protection



Power Connectors and Grounding

Copper and aluminum compression connectors and mechanical connectors provide critical electrical grounding and reliable wire terminations.

- Compression and mechanical lugs and splices designed for demanding power applications



Panduit Battery Compression Lugs provide OEM quality termination for Heavy Duty power connector applications. The Panduit BCL products are part of a complete offering of power connectors, lugs and tooling to provide a complete solution.



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

800.777.3300

www.panduit.com