



Heyco® Edge Clips





Unassembled or Assembled with 8" Cable Tie

- Steel clip provides high panel retention forces, while requiring low insertion force.
- Plastic housing ensures easy, ergonomic installation.
- Ideal solution for applications where holes are not available or temperatures are too extreme for adhesive solutions.
- Parallel orientation means the cable tie is parallel to the fixing edge.
- Perpendicular orientation means the cable tie is perpendicular to the fixing edge.

EDGE CLIP ONLY			EDGE CLIP & PRE- ASSEMBLED CABLE TIE			ASSEMBLED NYTYE CABLE TIE					
Fixing	Part No. Black	Desc.	Cable Tie Orientation	Part No. Black	Description	Tensile Strength Lbs. N		Max. Bundle Diameter in. mm.		Overall Length in. mm.	
For Panels from .04″ (1,0 mm) to .12″ (3,0 mm) Thick											
Side	15200*	EC13SMUA	Parallel Perpendicular	15202 15203	EC13SMPA8 EC13SMPE8	50	222	1.77	45,0	7.87	200
Top	15201*	EC13TMUA	Parallel Perpendicular	15204 15205	EC13TMPA8 EC13TMPE8						
For Panels from .12″ (3,0 mm) to .24″ (6,0 mm) Thick											
Side	15212 15206	EC36SMPAUA EC36SMPEUA	Parallel Perpendicular	15208 15209	EC36SMPA8 EC36SMPE8	50	222	1.77	45,0	7.87	200
Top	15213 15207	EC36TMPAUA EC36TMPEUA	Parallel Perpendicular	15210 15211	EC36TMPA8 EC36TMPE8						

Standard color black. For alternate materials or lengths, please contact Heyco.

*Bi-directional mounting platform allows for multiple orientations without the need for multiple SKUs.

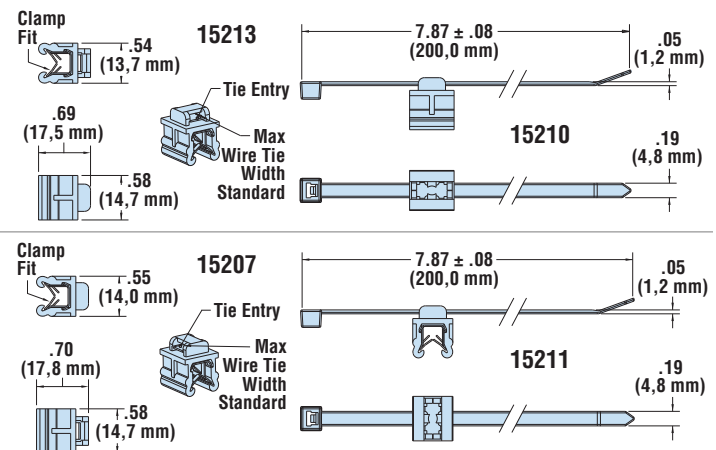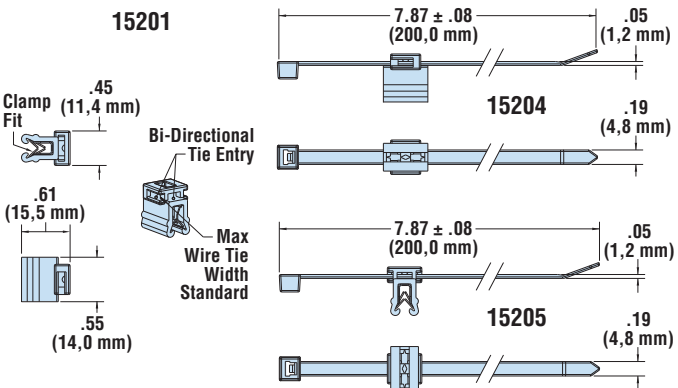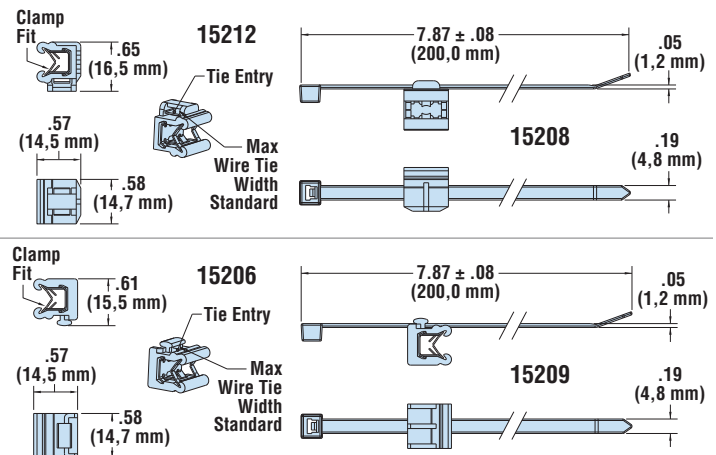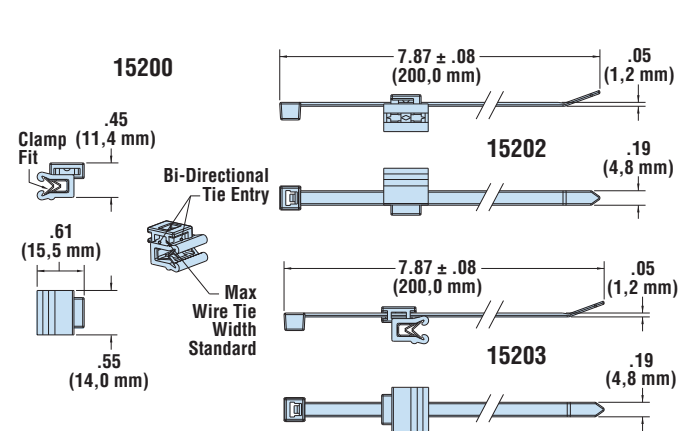

Quick
Specs

Material

Cable Tie: Nylon 6/6 UV Resistant

Flammability Rating

94V-2

Temperature Range

Cable Tie: -40°F (-40°C) to 185°F (85°C)

Edge Clip: -04°F (-18°C) to 221°F (105°C)

Edge Clip: Nylon 6/6 UV Resistant and Heat stabilized. Insert: Post nickel plated steel