




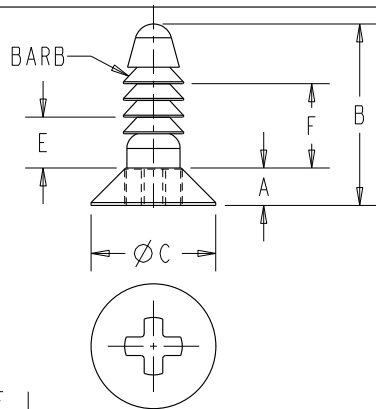


STYLE 1

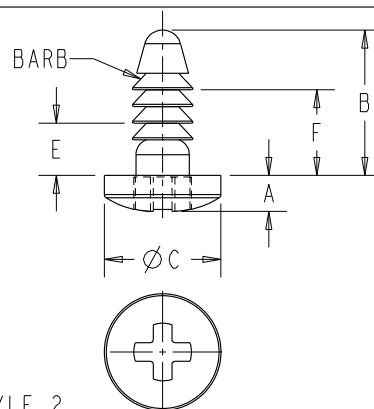

STYLE 2

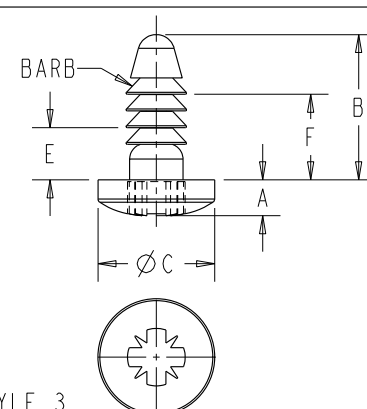

STYLE 3



STYLE	WILL FIT THESE PANELS								PART NUMBER		DESCRIPTION	PART DIMENSIONS											
	THREADED HOLE DIA.		MOUNTING HOLE DIA. D ±.015 (0,38mm)		PANEL THICKNESS							NATURAL		BLACK		A		B ±.010 (0,25mm)		C ±.010 (0,25mm)		PUSH IN FORCE MAX	
					MIN. E		MAX. F		HEAD HEIGHT							LENGTH BLW PANEL		HEAD DIAMETER		lbf	N	lbf	N
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.						
I	#4	M3	.083	2,1	.14	3,6	.24	6,0	15500	15500B	HPLPA 083-032	.07	1,7	.32	8,0	.22	5,5	6.7	30	11.2	50		
					.19	4,8	.32	8,0	15502	15502B	HPLPA 083-039			.39	10,0								
					.23	5,8	.39	10,0	15504	15504B	HPLPA 083-047			.47	12,0								
					.38	9,7	.47	12,0	15506	15506B	HPLPA 083-055			.55	14,0								
	#8	M4	.125	3,2	.20	5,1	.30	7,7	15508	15508B	HPLPA 125-039	.11	2,7	.39	10,0	.33	8,4	7.9	35	20.2	90		
					.26	6,6	.38	9,7	15510	15510B	HPLPA 125-047			.47	12,0			9.0	40	27.0	120		
					.31	7,9	.46	11,7	15512	15512B	HPLPA 125-055			.55	14,0								
					.41	10,4	.54	13,7	15514	15514B	HPLPA 125-063			.63	16,0								
	#10	M5	.161	4,1	.53	13,5	.69	17,7	15516	15516B	HPLPA 125-079	.11	2,7	.79	20,0	.37	9,3	10.1	45	33.7	150		
					.23	5,8	.33	8,4	15518	15518B	HPLPA 161-047			.47	12,0								
					.29	7,4	.41	10,4	15520	15520B	HPLPA 161-055			.55	14,0								
					.35	8,9	.49	12,4	15522	15522B	HPLPA 161-063			.63	16,0								
	1/4-20	M6	.201	5,1	.43	10,9	.65	16,4	15524	15524B	HPLPA 161-079	.13	3,3	.79	20,0	.44	11,3	7.9	35	27.0	120		
					.24	6,1	.37	9,4	15526	15526B	HPLPA 201-055			.55	14,0								
					.30	7,6	.45	11,4	15528	15528B	HPLPA 201-063			.63	16,0								
					.44	11,2	.61	15,4	15530	15530B	HPLPA 201-079			.79	20,0								
	5/16-18	M8	.250	6,4	.57	14,5	.80	20,4	15532	15532B	HPLPA 201-098	.19	4,7	.98	25,0	.62	15,8	12.4	55	40.5	180		
					.43	10,9	.57	14,5	15534	15534B	HPLPA 250-079			.79	20,0								
					.58	14,7	.77	19,5	15536	15536B	HPLPA 250-098			.98	25,0								
					.73	18,5	.96	24,5	15538	15538B	HPLPA 250-118			1.18	30,0								
					.88	22,4	1.16	29,5	15540	15540B	HPLPA 250-138												

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX± .015 .XXX± .005 ANGULAR± 1°

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: 0-10 ± .2; 10.01-30 ± .35; ABOVE 30 ± .5

MATERIAL: NYLON 6/6 UL94 V-2



HEYCO PRODUCTS, INC.
TOMS RIVER, NEW JERSEY

HEYCO PRODUCTS, INC. claims proprietary rights to the material disclosed hereon. This drawing and/or technical information is the property of HEYCO PRODUCTS, INC. is issued in confidence for use only as authorized, and may not be reproduced or described or shown to others without written permission from HEYCO PRODUCTS, INC.

DESCRIPTION:

CUSTOMER DRAWING FOR
HPLP SERIES PUSH SCREWS
SHEET 1 OF 3

HPLP-SERIES

PART No.

REV.: 0

STYLE	WILL FIT THESE PANELS								PART NUMBER		DESCRIPTION	PART DIMENSIONS																					
	THREADED HOLE DIA.		MOUNTING HOLE DIA. D ±.015 (0,38mm)		PANEL THICKNESS		NATURAL					BLACK		A		B ±.010 (0,25mm)		C ±.010 (0,25mm)		PUSH IN		PULL OUT											
					MIN. E				MAX. F					HEAD HEIGHT		LENGTH BLW PANEL		HEAD DIAMETER		FORCE MAX		FORCE MIN											
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.	lbf	N	lbf	N												
2	#4	M3	.083	2,1	.03	0,7	.16	4,0	15542	15542B	HPLPB 083-024	.09	2,4	.24	6,0	.22	5,6	6.7	30	11.2	50												
					.12	3,0	.24	6,0	15544	15544B	HPLPB 083-032			.32	8,0																		
					.18	4,6	.32	8,0	15546	15546B	HPLPB 083-039			.39	10,0																		
					.26	6,7	.39	10,0	15548	15548B	HPLPB 083-047			.47	12,0																		
	#8	M4	.125	3,2	.10	2,6	.22	5,7	15550	15550B	HPLPB 125-032	.12	3,1	.32	8,0	.32	8,0	7.9	35	20.2	90												
					.04	1,1	.24	6,2	15552	15552B	HPLPB 125-033			.33	8,5																		
					.15	3,7	.30	7,7	15554	15554B	HPLPB 125-039			.39	10,0																		
					.18	4,4	.38	9,7	15556	15556B	HPLPB 125-047			.47	12,0																		
					.25	6,4	.46	11,7	15558	15558B	HPLPB 125-055			.55	14,0			9.0	40	27.0	120												
					.31	8,1	.54	13,7	15560	15560B	HPLPB 125-063			.63	16,0																		
					#10	M5	.161	4,1	.08	1,9	.21			5,4	15562							15562B	HPLPB 161-035	.15	3,7	.35	9,0	.37	9,5	7.9	35	22.5	100
									.15	3,6	.25			6,4	15564							15564B	HPLPB 161-039			.39	10,0						
	.12	2,9	.33	8,4					15566	15566B	HPLPB 161-047	.47	12,0																				
	.24	6,0	.45	11,4					15568	15568B	HPLPB 161-059	.59	15,0																				
	.28	7,0	.49	12,4					15570	15570B	HPLPB 161-063	.63	16,0	10.1	45	33.7	150																
	.36	9,1	.57	14,4					15572	15572B	HPLPB 161-071	.71	18,0																				
	.39	9,7	.65	16,4					15574	15574B	HPLPB 161-079	.79	20,0																				
	1/4-20	M6	.201	5,1					.10	2,5	.21	5,4	15576					15576B	HPLPB 201-039	.18	4,6	.39	10,0			.47	12,0			7.9	35	27.0	120
					.17	4,3	.29	7,4	15578	15578B	HPLPB 201-047	.47	12,0																				
					.12	3,0	.35	8,9	15580	15580B	HPLPB 201-053	.53	13,5																				
					.18	4,6	.41	10,4	15582	15582B	HPLPB 201-059	.59	15,0	10.1	45	38.2	170																
					.17	4,1	.45	11,4	15584	15584B	HPLPB 201-063	.63	16,0																				
					.29	7,4	.53	13,4	15586	15586B	HPLPB 201-071	.71	18,0																				
					.38	9,5	.61	15,4	15588	15588B	HPLPB 201-079	.79	20,0																				
					.53	13,5	.80	20,4	15590	15590B	HPLPB 201-098	.98	25,0																				
	5/16-18	M8	.250	6,4	.07	1,8	.26	6,5	15592	15592B	HPLPB 250-047	.24	6,0	.47	12,0	.63	16,0	12.4	55	40.5	180												
					.14	3,5	.41	10,5	15594	15594B	HPLPB 250-063			.63	16,0																		
					.21	5,3	.49	12,5	15596	15596B	HPLPB 250-071			.71	18,0																		
					.31	8,0	.57	14,5	15598	15598B	HPLPB 250-079			.79	20,0			47.3	210														
					.51	13,0	.77	19,5	15600	15600B	HPLPB 250-098			.98	25,0																		
					.70	17,7	.96	24,5	15602	15602B	HPLPB 250-118			1.18	30,0																		
					.90	22,9	1.16	29,5	15604	15604B	HPLPB 250-138			1.38	35,0																		

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX± .015 .XXX± .005 ANGULAR± 1°

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: 0-10 ± .2; 10.01-30 ± .35; ABOVE 30 ± .5

MATERIAL: NYLON 6/6 UL94 V-2



HEYCO PRODUCTS, INC.
TOMS RIVER, NEW JERSEY

HEYCO PRODUCTS, INC. claims proprietary rights to the material disclosed hereon. This drawing and/or technical information is the property of HEYCO PRODUCTS, INC. is issued in confidence for use only as authorized, and may not be reproduced or described or shown to others without written permission from HEYCO PRODUCTS, INC.

DESCRIPTION:

CUSTOMER DRAWING FOR
HPLP SERIES PUSH SCREWS
SHEET 2 OF 3

HPLP-SERIES

PART No.

REV.: 0

STYLE	WILL FIT THESE PANELS								PART NUMBER		DESCRIPTION	PART DIMENSIONS											
	THREADED HOLE DIA.		MOUNTING HOLE DIA. D ±0.15 (0,38mm)		PANEL THICKNESS							NATURAL		BLACK		A		B ±.010 (0,25mm)		C ±.010 (0,25mm)		PUSH IN FORCE MAX	
					MIN. E		MAX. F		HEAD HEIGHT							LENGTH BLW PANEL		HEAD DIAMETER					
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		in.	mm.	in.	mm.	lbf	N	lbf	N				
3	#4	M3	.083	2,1	.03	0,7	.16	4,0	15606	15606B	HPLPC 083-024	.09	2,4	.24	6,0	.22	5,6	6.7	30	11.2	50		
					.12	3,0	.24	6,0	15608	15608B	HPLPC 083-032												
					.18	4,6	.32	8,0	15610	15610B	HPLPC 083-039												
					.27	6,7	.39	10,0	15612	15612B	HPLPC 083-047												
					.10	2,6	.22	5,7	15614	15614B	HPLPC 125-032												
	#8	M4	.125	3,2	.04	1,1	.24	6,2	15616	15616B	HPLPC 125-033	.12	3,1	.32	8,0	.32	8,0	7.9	35	20.2	90		
					.15	3,7	.30	7,7	15618	15618B	HPLPC 125-039												
					.18	4,4	.38	9,7	15620	15620B	HPLPC 125-047												
					.25	6,4	.46	11,7	15622	15622B	HPLPC 125-055												
					.31	8,1	.54	13,7	15624	15624B	HPLPC 125-063												
					.08	1,9	.21	5,4	15626	15626B	HPLPC 161-035												
					.15	3,6	.25	6,4	15628	15628B	HPLPC 161-039												
	#10	M5	.161	4,1	.12	2,9	.33	8,4	15630	15630B	HPLPC 161-047	.15	3,7	.37	9,5	.37	9,5	7.9	35	22.5	100		
					.24	6,0	.45	11,4	15632	15632B	HPLPC 161-059												
					.28	7,0	.49	12,4	15634	15634B	HPLPC 161-063												
					.36	9,1	.57	14,4	15636	15636B	HPLPC 161-071												
					.39	9,7	.65	16,4	15638	15638B	HPLPC 161-079												
					.10	2,5	.21	5,4	15640	15640B	HPLPC 201-039												
					.17	4,3	.29	7,4	15642	15642B	HPLPC 201-047												
	1/4-20	M6	.201	5,1	.12	3,0	.35	8,9	15644	15644B	HPLPC 201-053	.18	4,6	.53	13,5	.47	12,0	7.9	35	27.0	120		
					.18	4,6	.41	10,4	15646	15646B	HPLPC 201-059												
					.17	4,1	.45	11,4	15648	15648B	HPLPC 201-063												
					.29	7,4	.53	13,4	15650	15650B	HPLPC 201-071												
					.38	9,5	.61	15,4	15652	15652B	HPLPC 201-079												
					.53	13,5	.80	20,4	15654	15654B	HPLPC 201-098												
					.07	1,8	.26	6,5	15656	15656B	HPLPC 250-047												
	5/16-18	M8	.250	6,4	.14	3,5	.41	10,5	15658	15658B	HPLPC 250-063	.24	6,0	.63	16,0	.63	16,0	12.4	55	40.5	180		
					.21	5,3	.49	12,5	15660	15660B	HPLPC 250-071												
					.31	8,0	.57	14,5	15662	15662B	HPLPC 250-079												
					.51	13,0	.77	19,5	15664	15664B	HPLPC 250-098												
					.70	17,7	.96	24,5	15666	15666B	HPLPC 250-118												
					.90	22,8	1.16	29,5	15668	15668B	HPLPC 250-138												

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX± .015 .XXX± .005 ANGULAR± 1°

MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: 0-10 ± .2; 10.01-30 ± .35; ABOVE 30 ± .5

MATERIAL: NYLON 6/6 UL94 V-2



HEYCO PRODUCTS, INC.
TOMS RIVER, NEW JERSEY

HEYCO PRODUCTS, INC. claims proprietary rights to the material disclosed hereon. This drawing and/or technical information is the property of HEYCO PRODUCTS, INC. is issued in confidence for use only as authorized, and may not be reproduced or described or shown to others without written permission from HEYCO PRODUCTS, INC.

DESCRIPTION:

CUSTOMER DRAWING FOR
HPLP SERIES PUSH SCREWS
SHEET 3 OF 3

HPLP-SERIES

PART No.

REV.: 0