

F

E

D

C

B

A

F

E

D

C

B

A

NOTES:

A. MATERIAL AND FINISH:  
HOUSINGS: GLASS FILLED NYLON, SLIDE BOLT: ACETAL, INTERNAL COMPONENTS: ACETAL, AND METAL COMPONENTS

B. ELECTRICAL SPECIFICATIONS:  
OPERATING VOLTAGE: 5±0.5 VDC  
TYPICAL OPERATING CURRENT: LESS THAN 0.4A, PEAK / STALL CURRENT: 0.5A MAX  
TOTAL STANDBY CURRENT: RETRACTED: 0 AMPS, EXTENDED: 0 AMPS

**CAUTION!** NO STALL PROTECTION IS PROVIDED IN LATCH. USE APPROPRIATE CIRCUIT PROTECTION.  
OPERATING TEMPERATURE RANGE: 0°C TO 60°C NON-ICING, NON-CONDENSING ENVIRONMENT  
OPERATING HUMIDITY: 85% MAX.  
NOT INTENDED FOR DIRECT EXPOSURE TO OUTDOOR ELEMENTS.

C. ELECTRICAL CONNECTIONS AND HOOKUP:  
A BASIC SPDT SWITCH CONTROL ELECTRICAL HOOKUP DIAGRAM IS PROVIDED FOR REFERENCE.  
CONSULT WITH A SOUTHCO REPRESENTATIVE FOR ADDITIONAL ELECTRICAL HOOKUP INFORMATION.  
- CONNECT GROUND, AND CONTROL SIGNAL WIRES TO AN APPROPRIATE CONTROLLER AND DC POWER SUPPLY  
- A DC POWER SUPPLY CAPABLE OF SUPPLYING 5±0.5 VDC AT 1 AMP MINIMUM PER LATCH IS RECOMMENDED  
- POWER MUST BE AVAILABLE TO OPERATE THE LATCH AND MUST REMAIN AVAILABLE DURING THE FULL TRANSIT TIME OF THE LATCH DURING EXTENDING OR RETRACTING.

**CAUTION!** LATCH CAN BE DAMAGED IF WIRED INCORRECTLY, OR IF IMPROPER VOLTAGE IS APPLIED!  
WIRE COLOR CODE / CONNECTOR PIN ASSIGNMENT: SEE CONNECTOR PINOUT LOCATION DETAILS  
PIN1/BROWN WIRE: GROUND(-)  
PIN2/RED WIRE: LATCH BOLT EXTENDED +5V  
PIN3/ORANGE WIRE: LATCH BOLT RETRACTED +5V

D. ELECTRICAL OPERATION:  
TO OPERATE THE LATCH IN TWO POSITION MODE:  
-FOR EXTENDED(LOCKED) POSITION: APPLY +5 VDC TO RED WIRE FOR A MINIMUM OF 600ms, THE ORANGE WIRE SHOULD NOT BE CONNECTED(OPEN CIRCUIT)  
THE LATCH WILL TRANSIT TO THE EXTENDED POSITION ONCE AND STAY THERE.  
FROM THE EXTENDED (LOCKED)POSITION, THE DOOR CAN BE PUSHED TO CLOSE AND WILL LOCK.  
-FOR RETRACTED POSITION: APPLY +5 VDC TO ORANGE WIRE FOR A MINIMUM OF 600ms, THE RED WIRE SHOULD NOT BE CONNECTED(OPEN CIRCUIT)  
THE LATCH WILL TRANSIT TO THE RETRACTED POSITION ONCE AND STAY THERE.

**CAUTION!** TO PREVENT LONG TERM DAMAGE TO THE ELECTRICAL COMPONENTS IT IS IMPORTANT TO NOT STALL THE SLIDE BOLT DURING ELECTRICAL OPERATION. IT IS RECOMMENDED TO LIMIT POWER ON TIME FOR EITHER POSITION TO 1.5 SECONDS MAX.

- THE LATCH CANNOT REVERSE A CYCLE.
- THE LATCH MUST BE ALLOWED TO REACH ITS FULLY RETRACTED TRAVEL TO COMPLETE A CYCLE.
- SEE TECHNICAL DATA SHEET FOR CYCLE LOAD AND MAXIMUM OPERATING LOAD.

ALTERNATE ELECTRICAL OPERATION:  
TO OPERATE THE LATCH IN TRIGGER MODE:  
-WHEN OPERATED IN TRIGGER MODE THE LATCH WILL FULLY RETRACT AND THEN IMMEDIATELY EXTEND  
CONNECT BROWN WIRE TO GROUND(-), CONNECT RED WIRE TO +5VDC, PROVIDE A +5VDC CONTROL PULSE TO ORANGE WIRE.  
CONTROL SIGNAL PULSE REQUIRED ON ORANGE WIRE FOR TRIGGER MODE: 5 VDC +/-10%, 0.5A MAX  
RECOMMENDED PULSE DURATION 300 +/- 25 MILLISECONDS (ORANGE WIRE)



IT IS RECOMMENDED TO LIMIT POWER ON TIME TO 1.5 SECONDS MAX FOR STALLED MOTOR PROTECTION (RED WIRE).

NOTE: NO MECHANICAL OVERRIDE IS PROVIDED WITHIN THE LATCH. MECHANICAL OVERRIDE FEATURES OR ACCESS TO THE LATCH SHOULD BE CONSIDERED IN CASE OF LOSS OF POWER.


E. OPTIONAL CONNECTOR:  
MANUFACTURER: MOLEX, SERIES: MICROFIT 3.0  
- CONNECTOR RECEPTICAL, SINGLE ROW, 3 CIRCUITS, 3mm, MOLEX P/N: 43645-0300  
- CONTACTS: FEMALE CRIMP TERMINAL (SOCKET) MOLEX P/N: 43030-0004  
WIRE: 26 AWG STYLE UL1007/1569  
MATE FOR CONNECTOR (NOT SUPPLIED)  
MANUFACTURER: MOLEX, SERIES: MICROFIT 3.0  
- CONNECTOR PLUG 3 CIRCUITS 3 mm, MOLEX P/N: 43640-0301  
- RECOMMENDED CONTACTS (3 REQUIRED): MOLEX, MALE CRIMP TERMINAL (PIN), MOLEX P/N: 43031-0007  
- RECOMMENDED WIRE GAGE: 24 AWG

F. MOUNTING:  
-TWO Ø3.3MM THROUGH HOLES ARE PROVIDED FOR THROUGH HOLE MOUNTING WITH M3 OR 4-40 BOLTS. (NOT SUPPLIED)  
-MAXIMUM ALLOWABLE TORQUE ON THROUGH HOLE M3 OR 4-40 SOCKET HEAD CAP SCREWS 60 N.cm [5.3 in.lb]



G. PACKAGED IN INDIVIDUAL BAGS OR ADD -1 TO PART NUMBER FOR BULK PACKAGING, ADD SYMBOL TO PACKAGE:  
EXAMPLE: EM-05-52-2001 INDIVIDUAL PACKAGE  
EM-05-52-2001-1 BULK PACKAGE

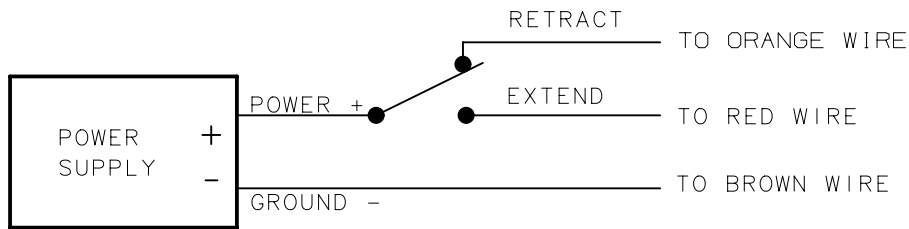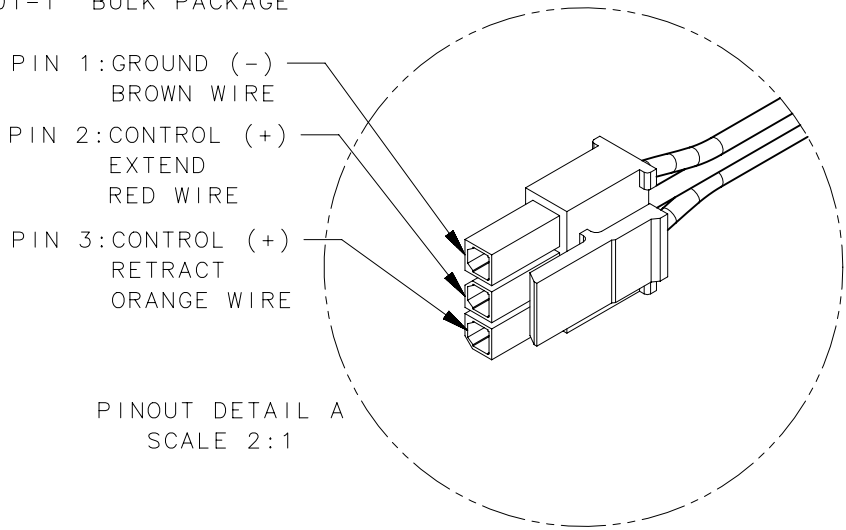



TWO POSITION MODE  
ELECTRICAL HOOKUP (SPDT SWITCH CONTROL)

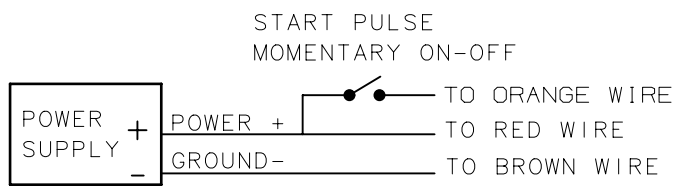



TRIGGER MODE  
ALTERNATE ELECTRICAL HOOKUP  
(START PULSE CONTROL)

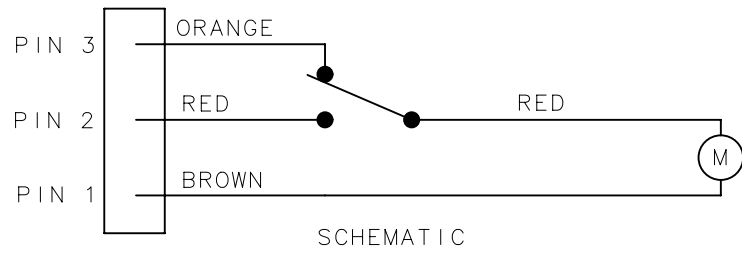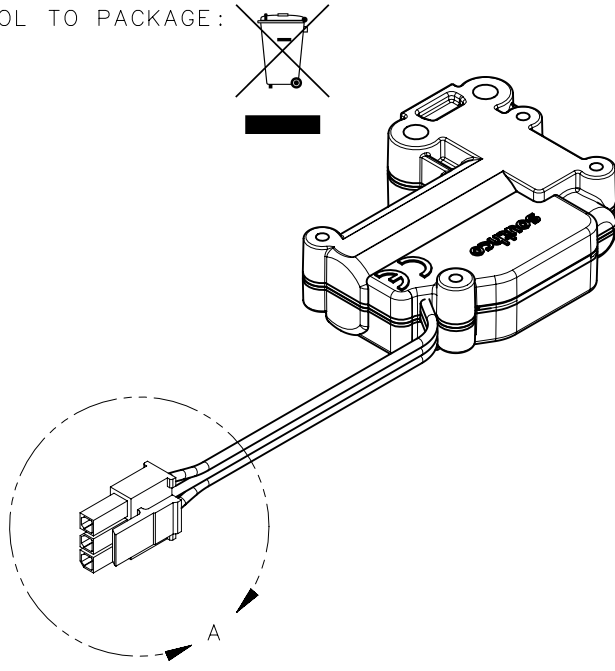

ELECTRO-MECHANICAL SLIDE BOLT  
SHOWN LATCH BOLT EXTENDED

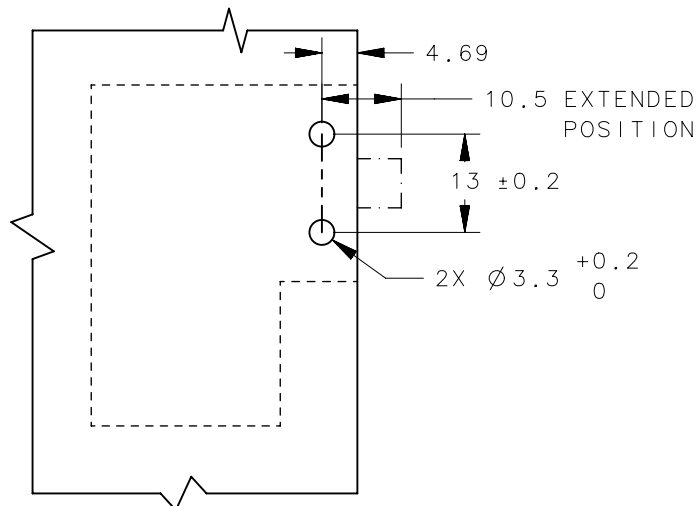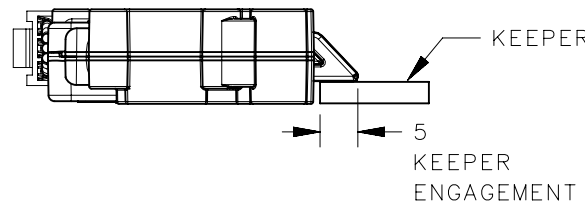

PANEL PREPARATION

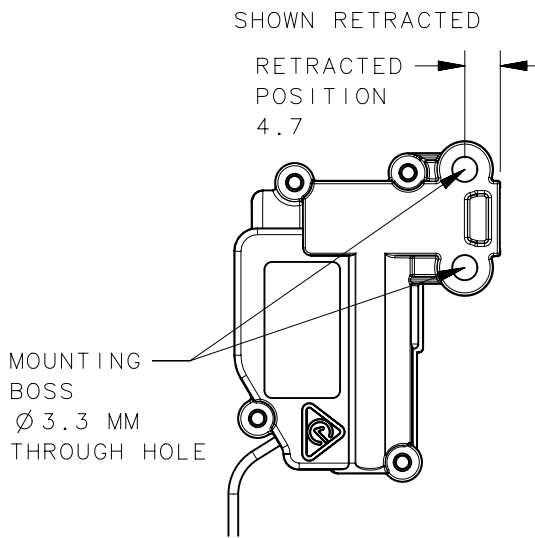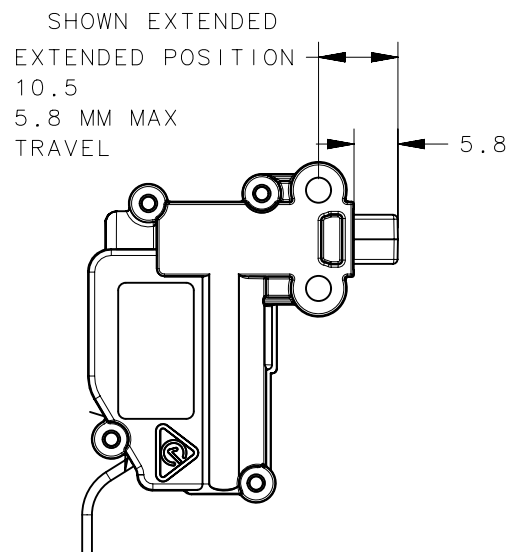

EM-05-55-2002	5V, ELECTRO-MECHANICAL SLIDE BOLT, RH, STRIPPED AND TINNED
EM-05-55-2001	5V, ELECTRO-MECHANICAL SLIDE BOLT, RH, WITH CONNECTOR
EM-05-54-2002	5V, ELECTRO-MECHANICAL SLIDE BOLT, LH, STRIPPED AND TINNED
EM-05-54-2001	5V, ELECTRO-MECHANICAL SLIDE BOLT, LH, WITH CONNECTOR
EM-05-53-2002	5V, ELECTRO-MECHANICAL SLIDE BOLT, UP, STRIPPED AND TINNED
EM-05-53-2001	5V, ELECTRO-MECHANICAL SLIDE BOLT, UP, WITH CONNECTOR
EM-05-52-2002	5V, ELECTRO-MECHANICAL SLIDE BOLT, DOWN, STRIPPED AND TINNED
EM-05-52-2001	5V, ELECTRO-MECHANICAL SLIDE BOLT, DOWN, WITH CONNECTOR
ASSEMBLY PART NUMBER DESCRIPTION	
	THIRD ANGLE PROJECTION
	MILLIMETERS [IN]
SURFACE AREA	XXXXXmm²
VOLUME	XXXXXmm³
PROPRIETARY ITEM	EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.
PER ASME Y14.5M-1994	DESCRIPTION ELECTRONIC ACCESS SOLUTION ELECTRO-MECHANICAL SLIDE BOLT SIZE SYSTEM A2 NX DWG NO. J-EM-05-5-1 DRAWN BY GGG DATE 04MAY2017 SCALE 1:1 SHEET 1 OF 2

F

E

D

C

B

A

F


E

D



C

B


A

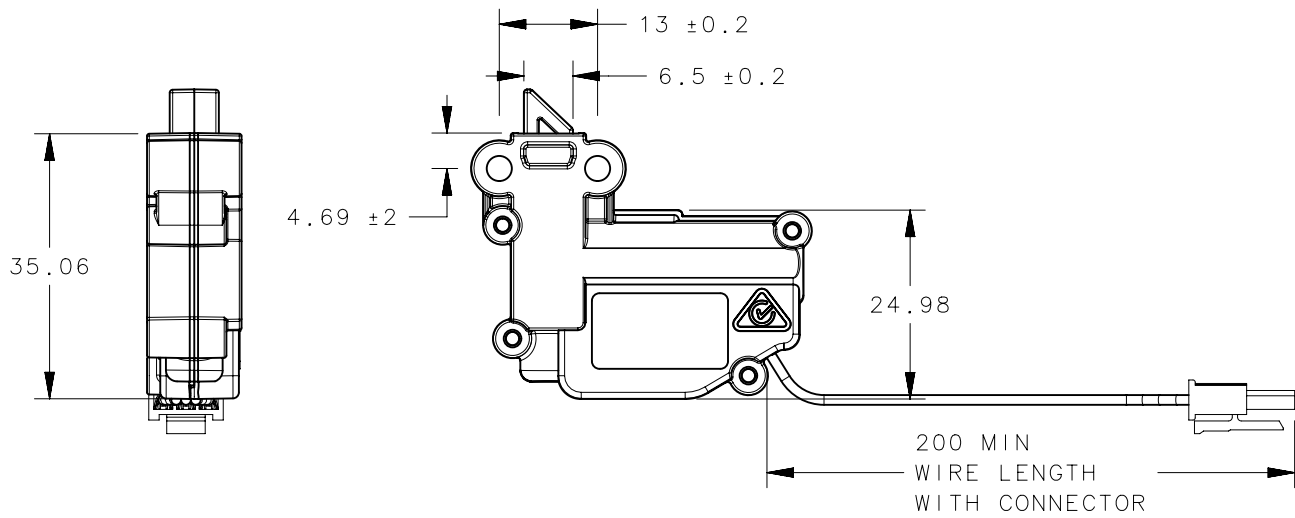



EM-05-55-2001, ELECTRO-MECHANICAL SLIDE BOLT LATCH BOLT RH, WITH CONNECTOR

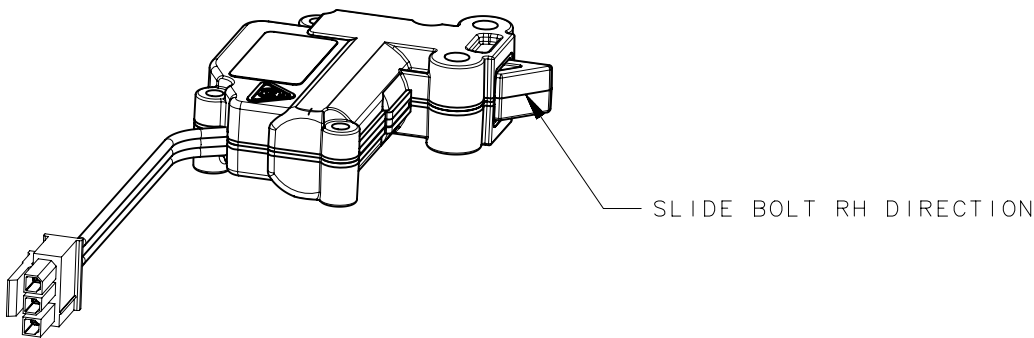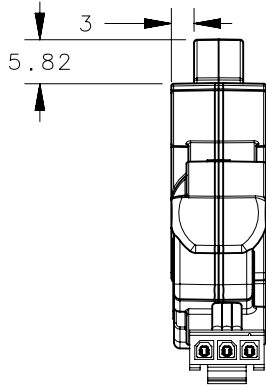


SLIDE BOLT RH DIRECTION

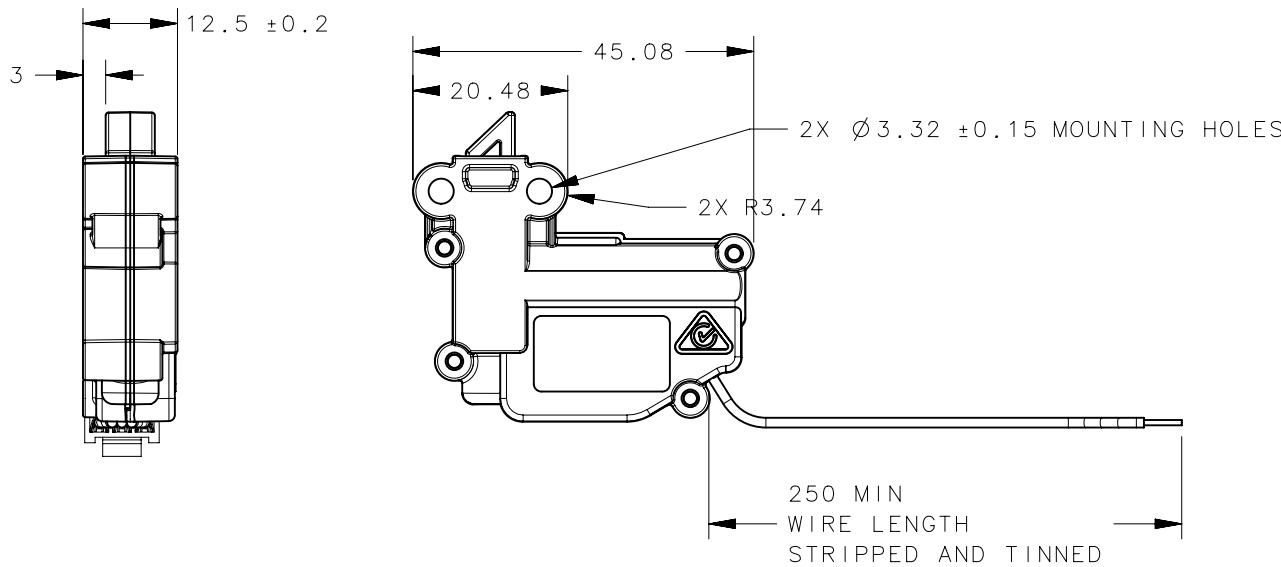



EM-05-54-2002, ELECTRO-MECHANICAL SLIDE BOLT LATCH BOLT LH, STRIPPED AND TINNED

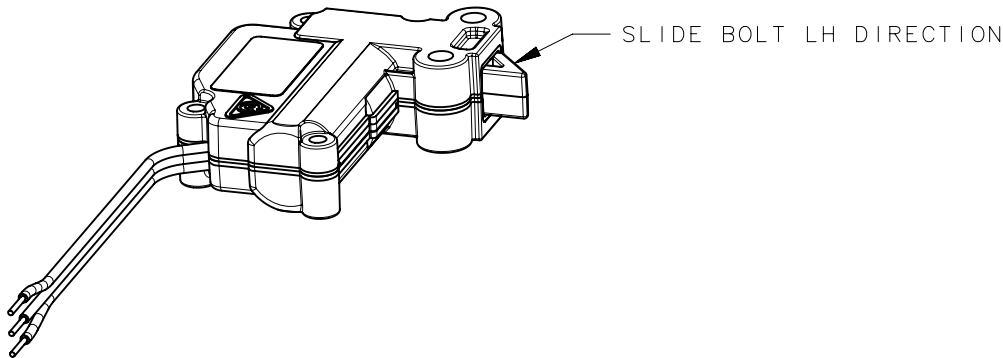


SLIDE BOLT LH DIRECTION

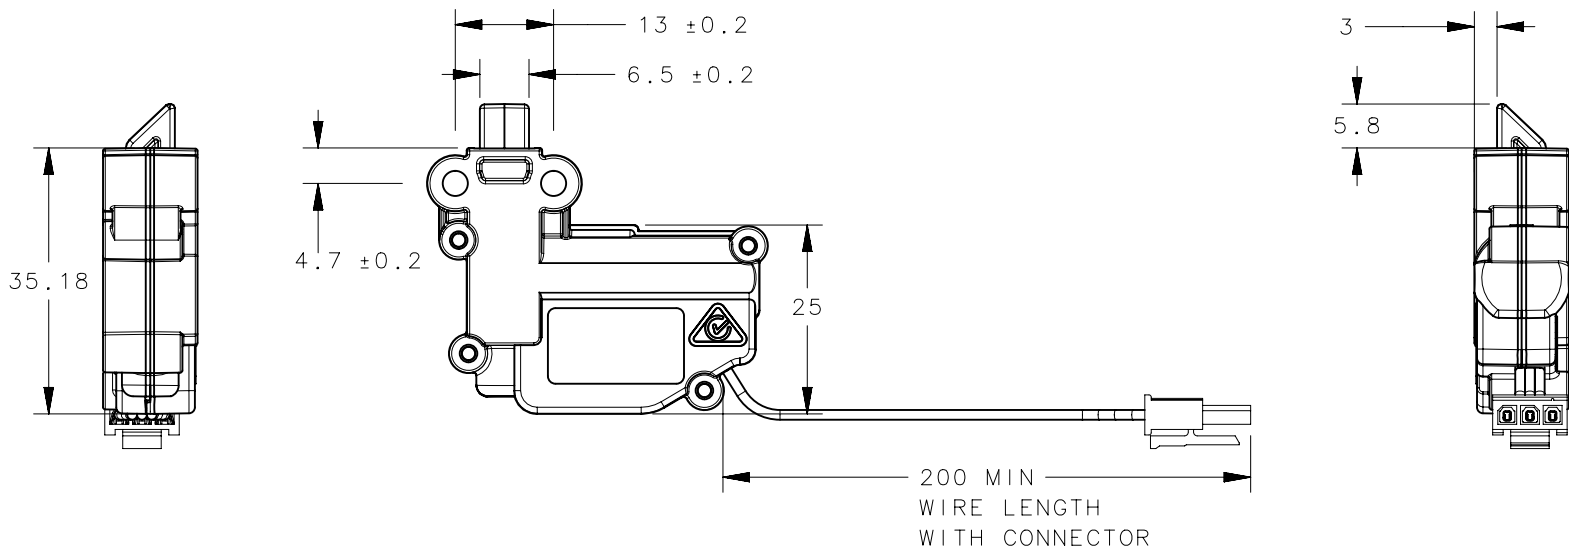



EM-05-53-2001, ELECTRO-MECHANICAL SLIDE BOLT LATCH BOLT UP DIRECTION, WITH CONNECTOR

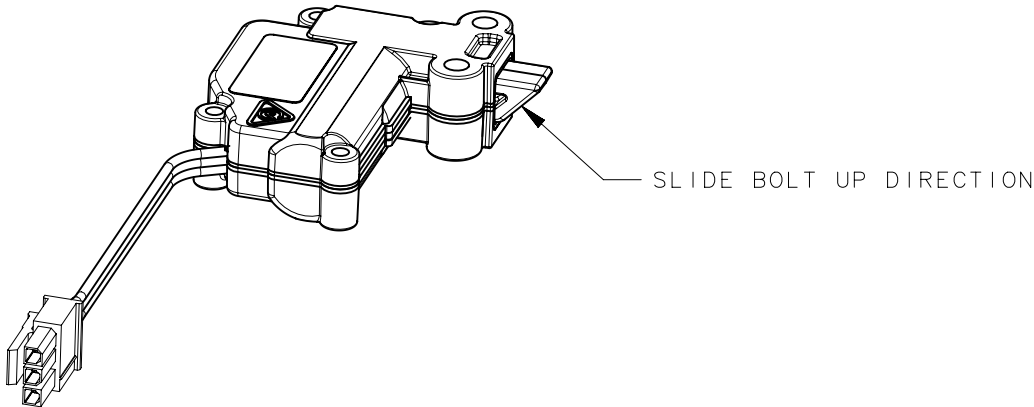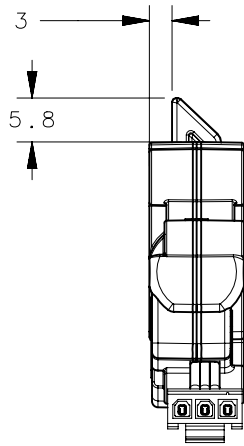



SLIDE BOLT UP DIRECTION

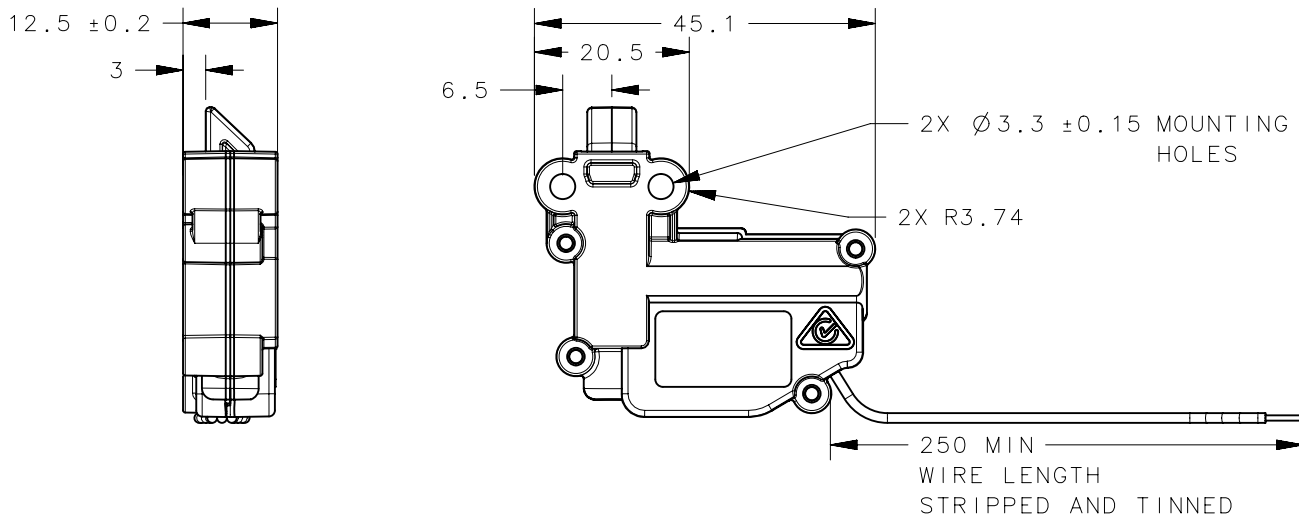

EM-05-52-2002, ELECTRO-MECHANICAL SLIDE BOLT LATCH BOLT DOWN DIRECTION, STRIPPED AND TINNED

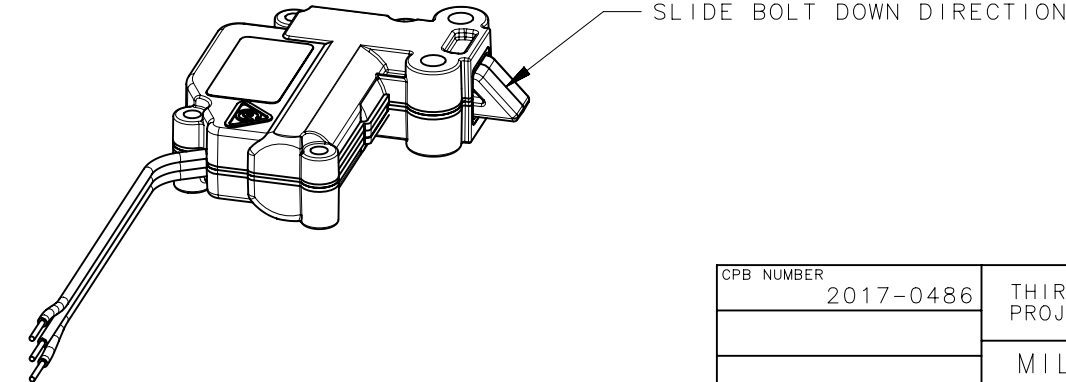

SLIDE BOLT DOWN DIRECTION

CPB NUMBER 2017-0486		THIRD ANGLE PROJECTION						CONNECT • CREATE • INNOVATE	
		MILLIMETERS [IN]							
SURFACE AREA		mm <sup>2</sup>		TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION		ELECTRONIC ACCESS SOLUTION	
VOLUME		mm <sup>3</sup>		ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		ELECTRO-MECHANICAL SLIDE BOLT			
PROPRIETARY ITEM		EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.		PER ASME Y14.5M-1994		SIZE SYSTEM A2 NX		DWG NO. J-EM-05-5-1	
				DRAWN BY GGG		DATE 04MAY2017		SCALE 1:1 SHEET 2 OF 2	