


LW Receptacle Assemblies



349

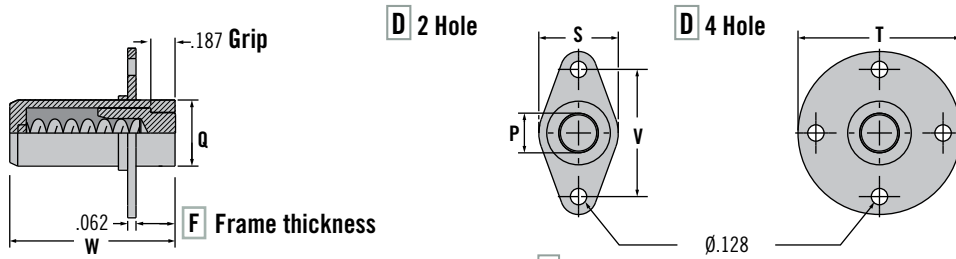

- Provides secure engagement in thin or soft materials
- Spring-loaded for assisted pin removal
- Provides dust / weather seal

Material and Finish

Stainless steel

Part Number Selection

Example: LW-1981-3C1-250
Receptacle, Ø 3/16 inch, 2 hole mount, .250 inch frame thickness

Other options available. For complete details on variety, part numbers, installation and specification, go to



www.southco.com/LW

LW - 1981 - D C B - F


D Size
C Receptacle Inside Diameter
B Base
1 2 hole
2 4 hole
F Frame thickness - in thousands of an inch
(.032 to .500 inch standard, example inch 048 = .048 inch)

Nominal Receptacle Inside Diameter	D Size	Dimensions					
		Ø P +.001 -.000	Ø Q +.001 -.004	S	Ø T	V	W
3/16	3	.190	.375	.625	1.281	1.000	1.25
1/4	4	.250	.375	.625	1.281	1.000	1.25
5/16	5	.312	.500	.625	1.281	1.000	1.25
3/8	6	.375	.625	.750	1.406	1.125	1.31


LW Lanyard Assemblies



Lanyard with tab

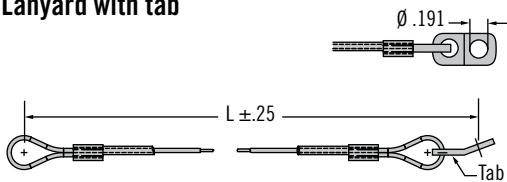

Lanyard no tab



Material and Finish

Cable: 300 Series stainless steel, vinyl coated
Tab: Aluminum

Part Number Selection

Example: LW-1023-1-5-50
Lanyard, with tab, green vinyl coated, 5.5 inch long

Other options available. For complete details on variety, part numbers, installation and specification, go to



www.southco.com/LW

LW - 10 S - F - L - L

S Style
23 With tab
36 No tab
F Finish
1 Green
2 Red
3 Black
4 Clear
5 Bare
L Length
(Part inches .99 inch max.)
L Length
(Full inches 4 inch min.)