

THRU HULLS

E



STANDARD STAINLESS STEEL THRU HULLS

- 316 Stainless steel construction
- Available with barb pipes
- Promotes a small visual footprint
- Consistent appearance across six different hose diameters



NYSTEEL THRU HULLS

- 316 Stainless steel and high nickel content provides non-magnetic properties and superior corrosion resistance
- Light weight thru hull technology
- Available with a straight or 90 degree angle
- Offers a one man installation with a key barb feature
- Available with round face



STALON THRU HULLS

- 316 Stainless steel face plate and nylon body offers a light weight thru hull technology with a stainless look
- Available in both straight, 90 degree and 15 degree angle designs
- Co-injected material under the face plate provides a permanent attachment



EXHAUST THRU HULLS

- 316 Stainless steel construction
- Incorporates a drip ring to avoid hull streaking
- Flapper stops water intrusion
- Available with a straight or 25 degree angle design
- Eight position angle adjustment



MANIFOLD ASSEMBLIES

- Assembly includes thru hull and manifold
- Available in 316 stainless steel



THRU HULLS

THRU HULL WITH BARB FITTING

- 316 stainless steel
- Reduced face size promotes a small visual footprint
- Available in 3 body sizes and fits the 6 most popular barb fittings


Part No	A mm	B mm	C mm	D mm	E mm
M7-01-9005203	16 (5/8")	76 (3")	32 (1 1/4")	43 (1 11/16")	30 (1 3/16")
M7-01-9205376	29 (1 1/8")	56 (2 1/4")	32 (1 1/4")	42 (1 15/84")	22 (7/8")
M7-01-9005204	19 (3/4")	76 (3")	32 (1 1/4")	43 (1 11/16")	30 (1 3/16")
M7-01-9105621	19 (3/4")	120 (4 3/4")	32 (1 1/4")	44 (1 3/4")	73 (2 7/8")
M7-01-9005205	25 (1")	76 (3")	32 (1 1/4")	44 (1 3/4")	30 (1 3/16")
M7-01-9105622	25 (1")	120 (4 3/4")	32 (1 1/4")	44 (1 3/4")	73 (2 7/8")
M7-01-9205372	19 (3/4")	53 (2 1/16")	32 (1 1/4")	42 (1 5/8")	20 (3/4")
M7-01-9005206	29 (1 1/8")	76 (3")	32 (1 1/4")	43 (1 11/16")	30 (1 3/16")
M7-01-9105623	29 (1 1/8")	120 (4 3/4")	32 (1 1/4")	44 (1 3/4")	73 (2 7/8")
M7-01-9005207	32 (1 1/4")	88 (3 1/2")	44 (1 3/4")	65 (2 9/16")	33 (1 5/16")
M7-01-9005208	38 (1 1/2")	88 (3 1/2")	44 (1 3/4")	65 (2 9/16")	33 (1 5/16")
M7-01-9105625	38 (1 1/2")	133 (5 1/4")	44 (1 3/4")	65 (2 9/16")	75 (3")
M7-01-9005218	51 (2")	133 (5 1/4")	55 (2 3/16")	82 (3 1/4")	50 (2")



90° SHORT THRU HULL


- 316 stainless steel
- Face size is identical to the Southco standard thru hull fitting

Part No	A mm	B mm	C mm	D mm	E mm
M7-04-9305320	16 (5/8")	60 (2 3/8")	32 (1 1/4")	43 (1 11/16")	17 (11/16")
M7-04-9305322	19 (3/4")	62 (2 7/16")	32 (1 1/4")	43 (1 11/16")	17 (11/16")
M7-04-9305324	25 (1")	65 (2 9/16")	32 (1 1/4")	43 (1 11/16")	17 (11/16")
M7-04-9305326	29 (1 1/8")	67 (2 5/8")	32 (1 1/4")	43 (1 11/16")	14 (9/16")
M7-04-9305328	38 (1 1/2")	81 (3 3/16")	41 (1 5/8")	58 (2 9/32")	14 (9/16")

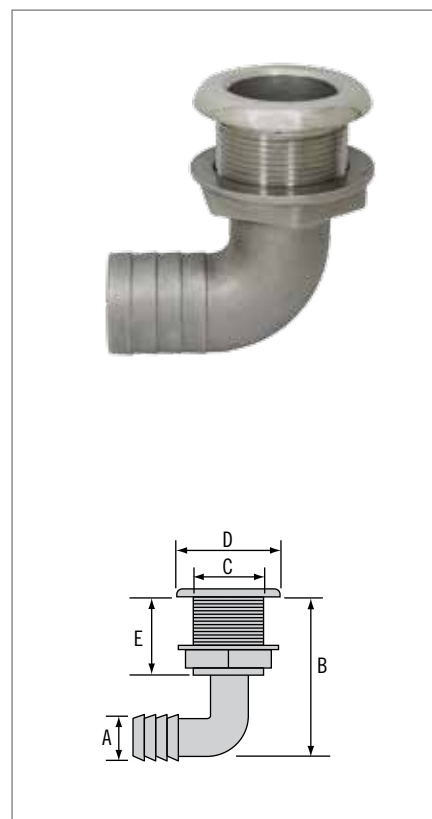

THRU HULLS


E

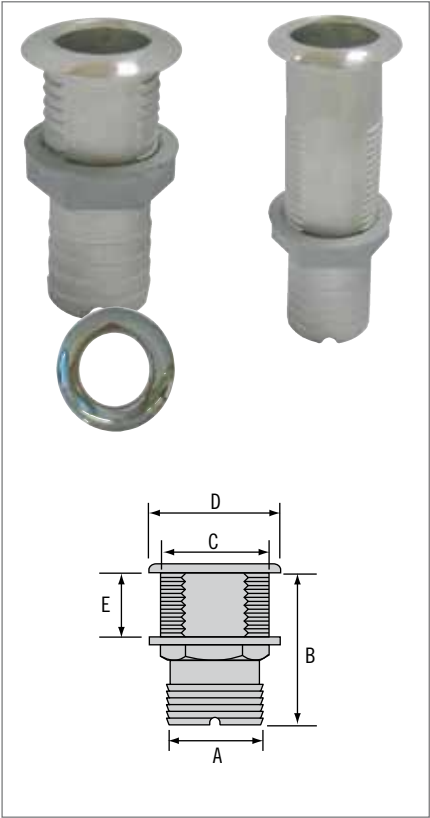

NYSTEEL THRU HULL

- 316 stainless steel with nylon nut
- Attractive round face design
- Innovative cast thread technology minimizes rust potential
- Light-weight design
- Two face sizes

Part No	A mm	B mm	C mm	D mm	E mm
M7-01-9405396	29 (1 1/8")	75 (2 7/8")	32 (1 1/4")	43 (1 11/16")	29 (1 1/8")
M7-01-9405400	38 (1 1/2")	87 (3 7/16")	41 (1 5/8")	55 (2 3/16")	29 (1 1/8")

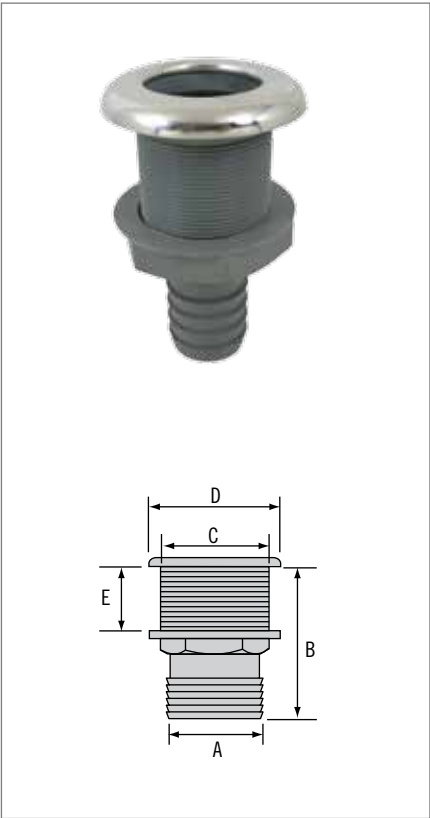

STALON THRU HULL

- Nylon body with 316 stainless steel cap
- Light-weight design with a stainless steel appearance


Part No	A mm	B mm	C mm	D mm	E mm
M7-01-9005241	16 (5/8")	81 (3 3/16")	33 (1 5/16")	48 (1 7/8")	28 (1 1/8")
M7-01-9005242	19 (3/4")	86 (3 3/8")	33 (1 5/16")	48 (1 7/8")	28 (1 1/8")
M7-01-9005243	26 (1")	86 (3 3/8")	33 (1 5/16")	48 (1 7/8")	28 (1 1/8")
M7-01-9005244	29 (1 1/8")	87 (3 7/16")	33 (1 5/16")	48 (1 7/8")	28 (1 1/8")
M7-01-9005245	32 (1 1/4")	103 (4 1/16")	41 (1 5/8")	60 (2 3/8")	33 (1 5/16")
M7-01-9005246	38 (1 1/2")	103 (4 1/16")	41 (1 5/8")	60 (2 3/8")	33 (1 5/16")
M7-01-9005255	52 (2")	130 (5 1/8")	56 (2 1/4")	82 (3 1/4")	46 (1 13/16")
M7-01-9005263	19 (3/4")	144 (5 11/16")	33 (1 5/16")	48 (1 7/8")	86 (3 7/16")
M7-01-9005264	29 (1 1/8")	144 (5 11/16")	33 (1 5/16")	48 (1 7/8")	86 (3 7/16")



THRU HULLS

STALON THRU HULL ANGLE


- Nylon & 316 Stainless Steel Cap
- Barb down angle design eliminates water trapping in the drain hose.

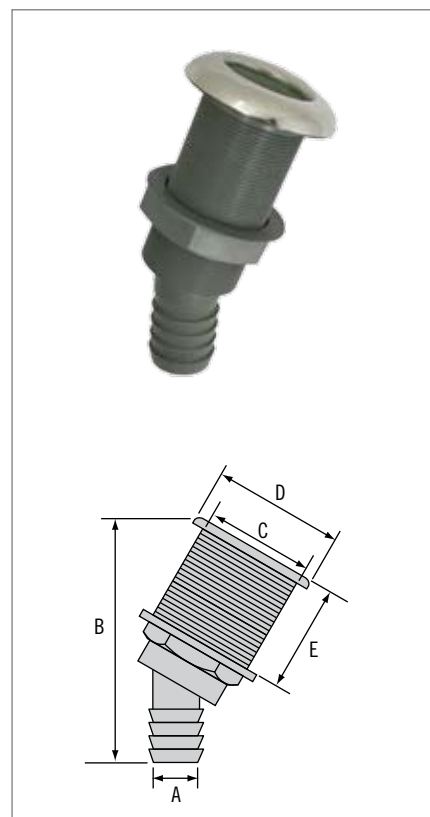

Part No	Model	A mm	B mm	C mm	D mm	E mm
M7-01-9005260	15°	38 (1 1/2")	178 (7")	56 (2 1/4")	82 (3 1/4")	100 (4")

90° STALON THRU HULL

- Nylon body with 316 stainless steel cap
- 90° angled barb design
- Same face design as the Southco straight stalon thru hull
- Light-weight design with a stainless steel appearance

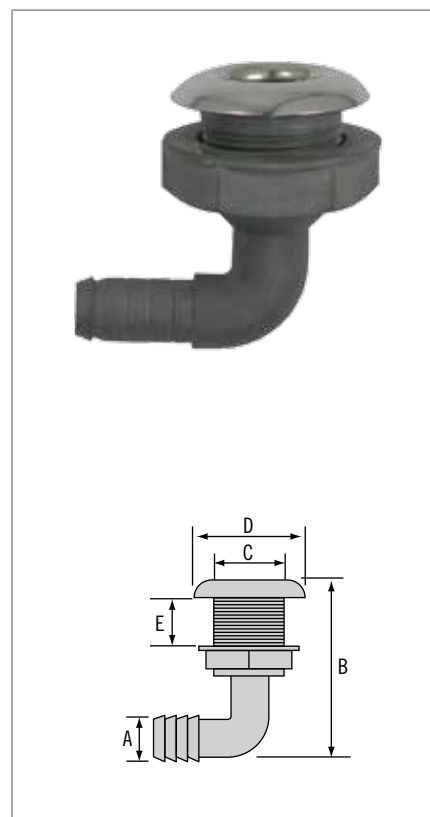


Part No	A mm	B mm	C mm	D mm	E mm
M7-04-9105418	16 (5/8")	69 (2 3/4")	33 (1 5/16")	48 (1 7/8")	25 (1")
M7-04-9005262	19 (3/4")	69 (2 3/4")	33 (1 5/16")	48 (1 7/8")	25 (1")
M7-04-9005256	19 (3/4")	81 (3 3/16")	33 (1 5/16")	48 (1 7/8")	28 (1 1/8")
M7-04-9105419	25 (1")	95 (3 3/4")	33 (1 5/16")	48 (1 7/8")	50 (2")
M7-04-9305113	29 (1 1/8")	92 (3 5/8")	33 (1 5/16")	48 (1 7/8")	35 (1 3/8")
M7-04-9005257	29 (1 1/8")	115 (4 1/2")	40 (1 5/8")	60 (2 3/8")	28 (1 1/8")
M7-04-9005258	38 (1 1/2")	119 (4 11/16")	40 (1 5/8")	60 (2 3/8")	33 (1 5/16")
M7-04-9105420	52 (2")	124 (4 7/8")	56 (2 1/4")	83 (3 1/4")	38 (1 1/2")



THRU HULLS


F

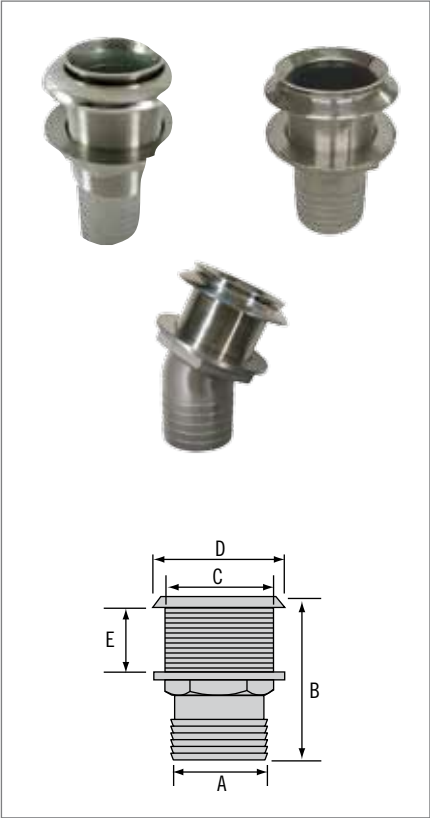

EXHAUST THRU HULL

- 316 stainless steel
- Innovative design features a stainless steel flapper and drip collar to prevent water intrusion and streaking of hull
- The one part collar features a flapper insert which can be rotated every 45° for the desired angle use

Part No	Straight or 25°	A mm	B mm	C mm	D mm	E mm
M7-05-9105563	One Part	50 (2")	138 (5 1/2")	57 (2 1/4")	80 (3 3/16")	53 (2 1/16")
M7-05-9205770	One Part	64 (2 1/2")	146 (5 3/4")	88 (3 1/2")	118 (4 5/8")	46 (1 7/8")
M7-05-9205772	One Part	76 (3")	146 (5 3/4")	88 (3 1/2")	118 (4 5/8")	46 (1 7/8")
M7-05-9405930	25°One Part	50 (2")	152 (6")	57 (2 1/4")	80 (3 3/16")	53 (2 1/16")

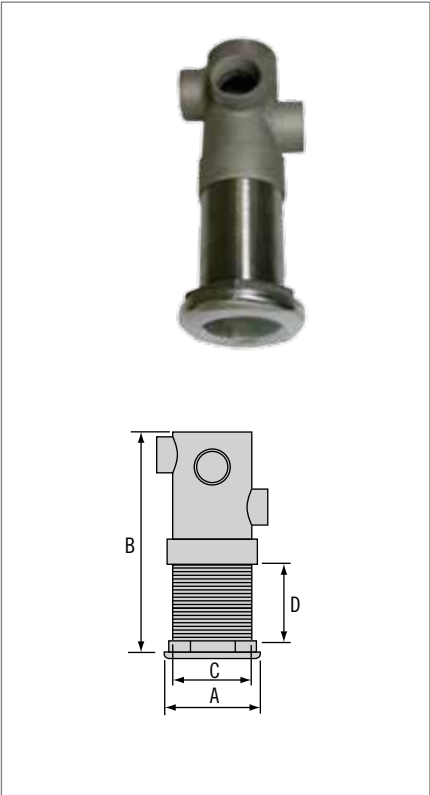

STAINLESS STEEL MANIFOLD

- 316 Stainless Steel
- Features three 19mm (3/4") staggered female pipe discharge parts

Part No	A mm	B mm	C mm	D mm
M7-09-9105511	65 (2 9/16")	170 (6 11/16")	45 (1 3/4")	68 (2 11/16")

