


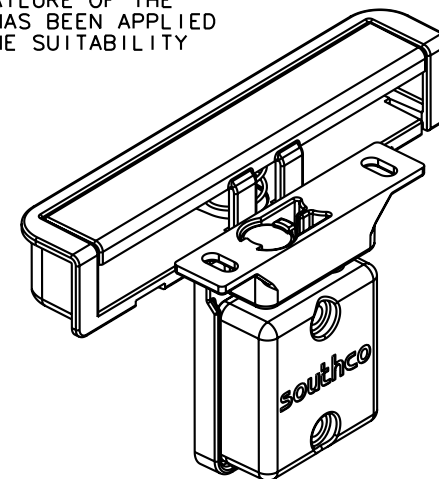
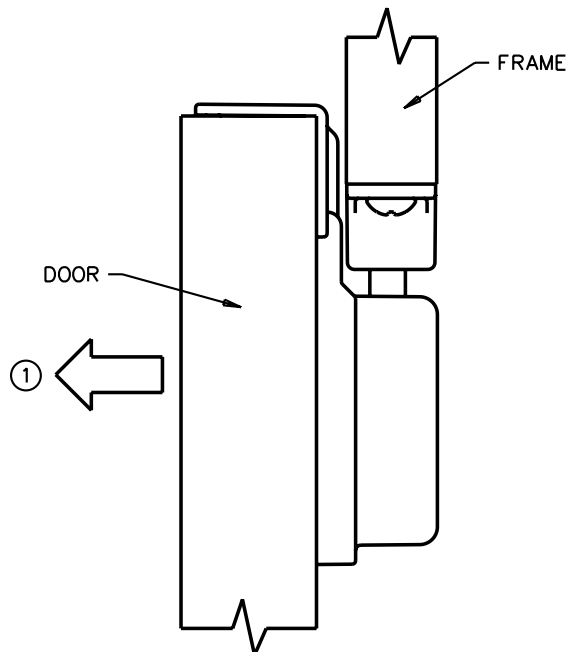
REV	DATE	DRAWN/CHKD	DESCRIPTION							
A	19SEP2008	JWJ/RLR	PRN: P2008-1034							
B	30OCT2008	JWJ/RLR	PRN: P2008-1183							



THIRD ANGLE PROJECTION

A4  
PAPER  
SIZE

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED. IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.



SEE J-MP-04-33 FOR PART NUMBERS

- ① AVERAGE ULTIMATE TENSILE LOAD  
(AT MIN RECOMMENDED ENGAGEMENT):  
540 N (120 lbf)
- ② CYCLE LIFE:  
GREATER THAN 15000 CYCLES

AVERAGE ULTIMATE LOAD - is the load that causes failure or excessive deformation which renders the product inoperable.

Overloading the fastener beyond these conditions is not recommended.